



# Festoon




## Low voltage “green” LED system with shatterproof outdoor-rated bulbs

- “Old School” classic look without the headaches
- Clear V6 and V12 “Filament” versions provide beautiful, warm, vintage look
- Frosted version in warm and cool white, plus a selection of rich, deep colors
- 24 Volts – Safe for public areas.
- 120V ETL Listed “Filament” lamps available! (V6 and V12)
- Lasts for years!



**Filament Lamps & Round Festoon Cable Now**



Designed in Australia

**Exclusive Distribution – The Americas, Europe, and Asia**

**sales@tmb.com**

Los Angeles  
+1 818.899.8818

London  
+44 (0)20.8574.9700

**tmb**  
www.tmb.com

New York  
+1 201.896.8600

Beijing  
+86 10.8492.1587

Toronto  
+1 519.538.0888



The perfect choice for:

- Restaurants
  - Theme parks
    - Retail
    - Malls
  - Signage
    - Parks
  - Festivals
  - Events
  - Buildings
  - Bridges
  - Casinos
  - Stage Sets
  - Film/TV Sets
  - Walkways
    - Boats
  - Safety Lighting
- And more!!





### Available Lamp Options

			
WARM WHITE G45 "FILAMENT" V12 LED 120 Volt AC 1 Watt	WARM WHITE G45 "FILAMENT" V6 LED 120 Volt AC 0.5 Watt	WARM WHITE G45 "FILAMENT" V12 LED 24 Volt AC/DC 1 Watt	WARM WHITE G45 "FILAMENT" V6 LED 24 Volt AC/DC 0.5 Watt
			
RED G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	BLUE G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	GREEN G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	PINK G45 21 SMD LED 24 Volt AC/DC 1.5 Watt
			
YELLOW G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	ORANGE G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	COOL WHITE PEARL G45 21 SMD LED 24 Volt AC/DC 1.5 Watt	WARM WHITE PEARL G45 21 SMD LED 24 Volt AC/DC 1.5 Watt

### Lamp Specifications

Part Number	Item	Lumen Output (LM)	Kelvin (K)	Voltage (V)	Watt (W)
FIRFESV12120VE	Warm white V12 "Filament", G45 round	39.8	2200	120 VAC	1
FIRFESV6120VE	Warm white V6 "Filament", G45 round	21.1	2200	120 VAC	0.5
FIRFESV1224VE2	Warm white V12 "Filament", G45 round	39.8	2200	24 VAC/DC	1
FIRFESV624VE2	Warm white V6 "Filament", G45 round	21.1	2200	24 VAC/DC	0.5
FIRFESRDLAMP	Red, 21 SMD LED, G45 round	11.7	-	24 VAC/DC	1.5
FIRFESBLLAMP	Blue, 21 SMD LED, G45 round	11.6	-	24 VAC/DC	1.5
FIRFESGNLAMP	Green, 21 SMD LED, G45 round	53.3	-	24 VAC/DC	1.5
FIRFESPKLAMP	Pink, 21 SMD LED, G45 round	12.8	-	24 VAC/DC	1.5
FIRFESYWLAMP	Yellow, 21 SMD LED, G45 round	17.9	-	24 VAC/DC	1.5
FIRFESORLAMP	Orange, 21 SMD LED, G45 round	8.1	-	24 VAC/DC	1.5
FIRFESCWFLAMP	Cool White, 21 SMD LED, G45 round	70.2	5600	24 VAC/DC	1.5
FIRFESWWFLAMP	Warm White, 21 SMD LED, G45 round	68.4	2030	24 VAC/DC	1.5

Note: For outdoor use, application of a thin coat of silicone grease to lamp's metal screw base before inserting in socket is recommended.

## Firefly Festoon Cables


- IP44 Rated. Weatherproof flange protects lamp holders and lamp bases from moisture.
- Round and Flat cables available. Flat cable is self-leveling for ease of installation. Round cable is available in suspended and inline versions.
- Round cables are ETL Listed and retain listing even when cut to length in the field
- Cables are self-supporting up to 10 meters. Maximum continuous cable run 40 meters.

### Round Festoon Cables

Available in black. Round cable with suspended or inline E26 sockets. Imperial socket spacing.

Type	Spacing				
Inline	12 in	15 in <sup>1</sup>	18 in	24 in	36 in
Suspended	12 in	-	-	24 in	-

<sup>1</sup>Available by special order, MOQ may apply

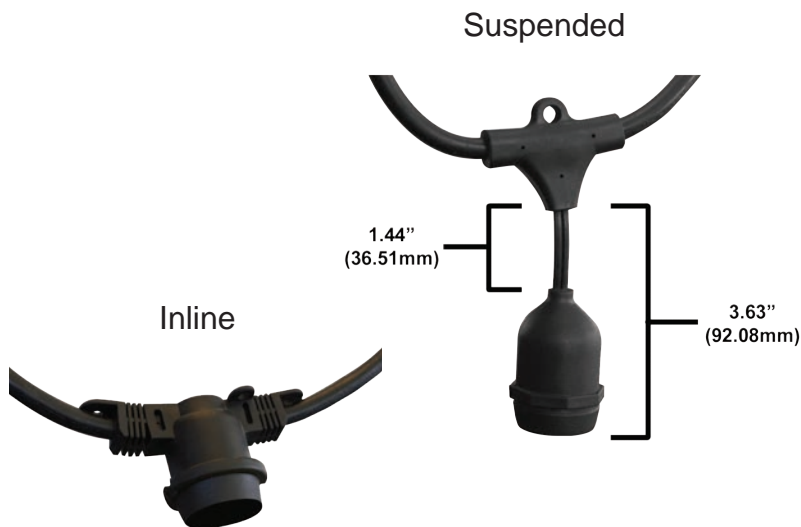

### Flat, Self-Leveling Festoon Cables<sup>2</sup>

Available in black or white. Flat design ensures uniform lamp orientation. Metric E27 socket spacing.

Color	Spacing					
Black	15 cm	20 cm	40 cm	50 cm	90 cm	1.5 m
White	-	-	-	50 cm	90 cm	-

<sup>2</sup>Available by special order, MOQ may apply

