



STAND ALONE DMX CONTROLLER, STICK-DE3



QUICK SPECIFICATIONS


INCLUDED IN PACKAGE	Controller, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher / iOS phone or tablet / Android phone or tablet
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (Mac/Windows) DMX Lightpad 3 App (iOS/Android) Easy Remote App (iOS/Android)
CONNECTIONS	Power/DMX - screw terminal and RJ45 compatible Memory - MicroSD slot Programming - MicroUSB port
POWER SUPPLY	6VDC power supply (included)
MEMORY	MicroSD card (not included)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only
WARRANTY	5 year limited

PART NUMBER

SERIES	PROTOCOL	TYPE
LLI-C-CTRL	DMX	STICK-DE3

POWER OPTIONS


Power and DMX cable connections shown on screw-terminal connector. Controller may be powered by Power + DMX RJ45 cable instead

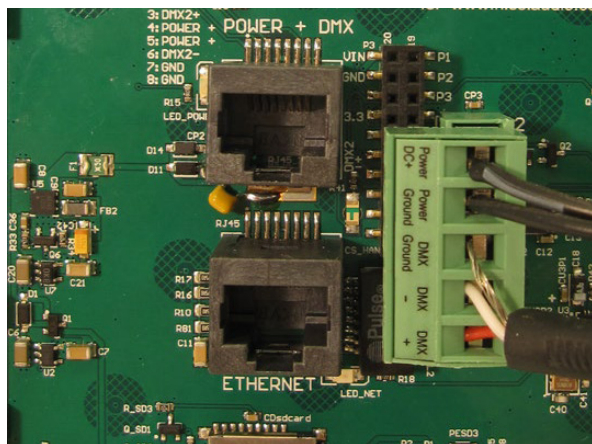

NOTE: Do not apply power to the DMX screw-terminal input. Doing so will damage the controller and void the warranty.

FEATURES

- Compatible with any DMX LED driver
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- Integrated clock and calendar for scheduling events
- Touch-sensitive buttons
- USB and Ethernet connectivity for programming
- Windows/Mac software for programming dynamic effects
- iPhone/iPad/Android apps for remote control and program

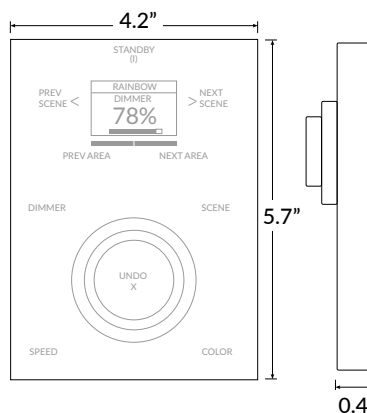

STAND ALONE DMX CONTROLLER, STICK-DE3

EXAMPLE WIRING DIAGRAM LED POWER SUPPLY, DECODER, AND LED TAPE SOLD SEPARATELY

