



DATE	PROJECT	FIRM	TYPE
------	---------	------	------

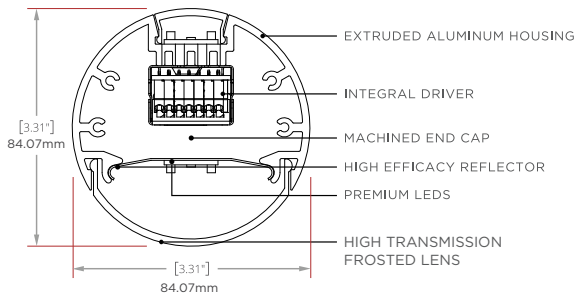

PERFORMANCE

STATIC WHITE | FLOOD DIRECT & FLOOD INDIRECT

POWER LEVELS	LIGHT DIRECT LM/4FT	LIGHT INDIRECT LM/4FT	TOTAL LIGHT LM/4FT	ENERGY WATTS/4FT	EFFICACY LPW	CCT/CRI
VL	2055	2169	4224	32	132	4000/80
L	2881	3040	5921	48	123	4000/80
S	3814	4025	7839	64	122	4000/80
H	4589	4843	9432	80	118	4000/80
VH	5535	5842	11377	96	119	4000/80



CCT MULTIPLIERS STATIC WHITE

CCT	2700K		3000K		3500K		4000K		5000K	
CRI	80	90	80	90	80	90	80	90	80	90
MULTIPLIER	0.93	0.79	0.96	0.82	0.97	0.85	1	0.89	1.01	0.89

FEATURES:

- HIGH TRANSMISSION FROSTED LENSES
- 1% DIMMING DRIVERS STANDARD
- ADJUSTABLE AIRCRAFT CABLE SUSPENSION SYSTEM
- EXTRUDED ALUMINUM HOUSING WITH NO VISIBLE FASTENERS
- MACHINED ALUMINUM END CAPS WITH EASY ACCESS REMOVAL
- 360 DEGREE ROTATION OPTION WITH MECHANICAL LOCKING
- BI-DIRECTIONAL FIXTURE
- UGR<19 IN SELECT OUTPUTS AND CONFIGURATIONS

NOTE: ALL ITALICIZED OPTIONS MAY INCREASE LEAD TIME. PLEASE CONTACT FACTORY WITH QUESTIONS.



FIXTURE MODEL	MOUNTING	NOMINAL LENGTH (FT)	CCT/CRI	DIRECT POWER LEVEL ¹	DIRECT BEAM DISTRIBUTION	INDIRECT POWER LEVEL ¹	INDIRECT BEAM DISTRIBUTION	DRIVER
O3.1 Oxygen 3.1	CS Cable Suspended - CSR Cable Suspended Rotational	2 3 4 5 6 7 8 CR ^{1,2} Continuous Run (Specify Length in Nominal Feet)	827 830 835 840 850 927 930 935 940 950 TW2765 WD1827 RGBW ¹	VL Very low L Low S Standard H High VH Very High	F Flood	VL Very low L Low S Standard H High VH Very High	F Flood B Batwing	1D 0-10V EldoLED 1% 01D 0-10V EldoLED 0.1% LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5% 1DT (TW) ² 1DW (WD) ² DMX8 Standard 8 bit (RGBW) ¹ DMX16 Optional 16 bit (RGBW) ¹ DALI (INTL) TWS (Sensor Fixtures) ³ 1. Driver must reside in remote housing 2. 0-10V input - CHOOSE DALI instead for INTL versions 3. Integrated Sensor options pair with TWS driver only
		1. Power feed is always first section of a continuous run 2. Rotational mounting w/CR will have a power feed for every section	1. Pair only w/ power level(s) = S, beams = F	1. 2ft & 3ft - must have same power output for up and down		1. 2ft & 3ft - must have same power output for up and down		

HOUSING FINISH	END CAPS FINISH ¹	CANOPY SIZE	CANOPY FINISH	POWER CORD	CABLE LENGTH	OPTIONS ⁶
SC Satin Clear Anodize SW Satin White Powder Coat MB Matte Black Powder Coat CF Custom Finish (Consult Factory)	MF Machined Finish SW Satin White MB Matte Black CF Custom Finish (Consult Factory)	44 4" Power feed canopy 4" Non-power feed canopy 44E 4" Power feed canopy 4" Non-power feed canopy - International 40 4" Power feed canopy Canopy only at power feed 40E 4" Power feed canopy Canopy only at power feed - International 41 4" Power feed canopy 1" Non-power feed canopy 41E 4" Power feed canopy 1" Non-power feed canopy - International	MF Machine Finish SW Satin White MB Matte Black CF Custom Finish (Consult Factory)	W White G Gray ¹ B Black	4 4' 8 8'	EMB7 ^{1,3,5,6} 7 Watt battery back-up (Approximately 600 lumens) EMB12 ^{1,4,5,6} 12 Watt battery back-up (Approximately 1000 lumens) EMW ^{1,2} Emergency Circuit Wiring WSN ⁶ WSN nLight sensor WSE ⁶ WSE Enlighted Sensor WSW ⁶ WSW Wavelinx Sensor WSL ⁶ WSL Lutron Vive Sensor DUAL Dual Circuit 1. EMB/EMW only linked to first section of continuous run 2. EMW not available for 2R/3R lengths 3. EMB7 - 6ft and up 4. EMB12 - 7ft and up 5. EMB not available for combined 8FT length & VH power 6. Factory EMB and Sensor (WS) options not avail for INTL
	1. CSR rotational hardware finish matches end cap finish.			1. Not available for INTL		

GENERAL NOTES:

All fixtures are UL listed for dry and damp locations. Fixtures with International (E) option designation are CE and ROHS compliant. INTEGRAL DRIVER for all options. Please contact the factory with any specification questions.



FIXTURE ORIENTATION

Bidirectional (CSR) for downlight and uplight applications. Rotational (CSR) for adjustable applications: 360 degree rotational capacity with locking mechanism.


ECOSENSE®

ECOSENSE LIGHTING INC.
837 NORTH SPRING STREET
SUITE 103
LOS ANGELES, CA 90012

P • 310.496.6255
F • 310.496.6256
T • 855.632.6736
855.6.ECOSEN


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT ECOSENSELIGHTING.COM FOR THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT ECOSENSELIGHTING.COM/IP-PORTFOLIO/. ©2019 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE, THE ECOSENSE LOGO, TROV, TROV AND ECOSPEC ARE REGISTERED TRADEMARKS OF ECOSENSE LIGHTING INC. RISE™, SLIM COVE™, FREEDOM TO CREATE™, MACRO™, FLIP-TO-FLAT™ ARE TRADEMARKS OF ECOSENSE LIGHTING INC.

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

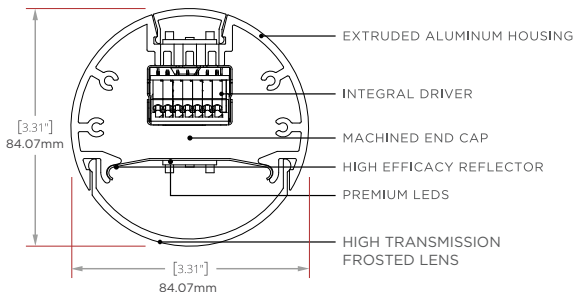

FEATURES:


- 3/4" DIAMETER RIGID TUBE MOUNTING SYSTEM
- HIGH TRANSMISSION FROSTED LENSES
- 1% DIMMING DRIVERS STANDARD
- EXTRUDED ALUMINUM HOUSING WITH NO VISIBLE FASTENERS
- MACHINED ALUMINUM END CAPS WITH EASY ACCESS REMOVAL
- 360 DEGREE ROTATION OPTION WITH MECHANICAL LOCKING



NOTE: ALL ITALICIZED OPTIONS MAY INCREASE LEAD TIME. PLEASE CONTACT FACTORY WITH QUESTIONS.

FIXTURE MODEL	MOUNTING	NOMINAL LENGTH (FT)	CCT/CRI	DIRECT POWER LEVEL ¹	DIRECT BEAM DISTRIBUTION	INDIRECT POWER LEVEL ¹	INDIRECT BEAM DISTRIBUTION	DRIVER
O3.1 Oxygen 3.1	RAM Rotational Arm Mount <i>RAME</i> Rotational Arm Mount - International	2 3 4 5 6 7 8 CR^{1,2} Continuous Run (Specify Length in Nominal Feet)	827 830 835 840 850 927 930 935 940 950 <i>TW2765</i> <i>WD1827</i> <i>RGBW⁴</i>	VL Very low L Low S Standard H High VH Very High	F Flood	VL Very low L Low S Standard H High VH Very High	F Flood B Batwing	1D 0-10V EldoLED 1% <i>01D</i> 0-10V EldoLED 0.1% <i>LDE1</i> Lutron Ecosystem 1% <i>LDE5</i> Lutron Ecosystem 5% <i>1DT (TW)²</i> <i>1DW (WD)²</i> <i>DMX8</i> Standard 8 bit (RGBW) ¹ <i>DMX16</i> Optional 16 bit (RGBW) ¹ <i>DALI (INTL)</i> <i>TWS (Sensor Fixtures)³</i>
		1. Power feed is always first section of a continuous run 2. Rotational mounting w/CR will have a power feed for every section	1. Pair only w/ power level(s) = S, beams = F	1. 2ft & 3ft - must have same power output for up and down		1. 2ft & 3ft - must have same power output for up and down		1. Driver must reside in remote housing 2. 0-10V input - CHOOSE DALI instead for INTL versions 3. Integrated Sensor options pair with TWS driver only

HOUSING FINISH	END CAPS & RAM HARDWARE FINISH	ARM LENGTH NOM (IN)	MOUNTING PLATE	OPTIONS ⁵
SC Satin Clear Anodize SW Satin White Powder Coat MB Matte Black Powder Coat <i>CF</i> Custom Finish (Consult Factory)	MF Machined Finish SW Satin White MB Matte Black <i>CF</i> Custom Finish (Consult Factory)	3 6 ¹ 9 ¹ 12 ¹	4CPF	EMB7^{1,3,5,6} 7 Watt battery back-up (Approximately 600 lumens) EMB12^{1,4,5,6} 12 Watt battery back-up (Approximately 1000 lumens) EMW^{1,2} Emergency Circuit Wiring <i>WSN⁶</i> WSN nLight sensor <i>WSE⁶</i> WSE Enlighted Sensor <i>WSW⁶</i> WSW Wavelinx Sensor <i>WSL⁶</i> WSL Lutron Vive Sensor <i>DUAL</i> Dual Circuit
		1. Includes Mounting Tieback		1. EMB/EMW only linked to first section of continuous run 2. EMW not available for 2ft/3ft lengths 3. EMB7 - 6ft and up 4. EMB12 - 7ft and up 5. EMB not available for combined 8ft length & VH power 6. Factory EMB and Sensor (WS) options not avail for INTL

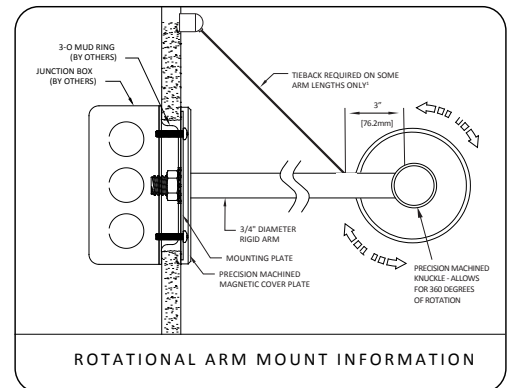


GENERAL NOTES:

All fixtures are UL listed for dry and damp locations. Fixtures with International (E) option designation are CE and ROHS compliant. INTEGRAL DRIVER for all options. Please contact the factory with any specification questions.




DATE	PROJECT	FIRM	TYPE
------	---------	------	------

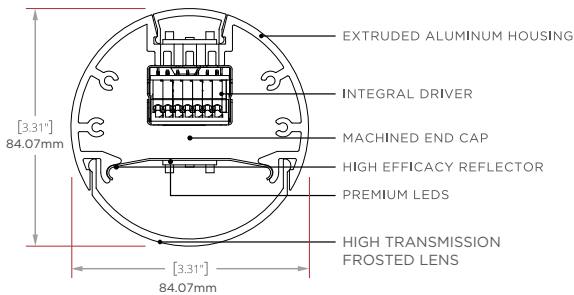

FEATURES:


- WALL MOUNTING SYSTEM WITH PRE LOCATED FIXTURE HARDWARE FOR EASY SURFACE INSTALL
- HIGH TRANSMISSION FROSTED LENSES
- 1% DIMMING DRIVERS STANDARD
- EXTRUDED ALUMINUM HOUSING WITH NO VISIBLE FASTENERS
- MACHINED ALUMINUM END CAPS WITH EASY ACCESS REMOVAL



NOTE: ALL ITALICIZED OPTIONS MAY INCREASE LEAD TIME. PLEASE CONTACT FACTORY WITH QUESTIONS.

FIXTURE MODEL	MOUNTING	NOMINAL LENGTH (FT)	CCT/CRI	DIRECT POWER LEVEL ¹	DIRECT BEAM DISTRIBUTION	INDIRECT POWER LEVEL ¹	INDIRECT BEAM DISTRIBUTION	DRIVER
O3.1 Oxygen 3.1	SMS Surface Mount Side SMSE Surface Mount Side - International	2 3 4 5 6 7 8 CR¹ Continuous Run (Specify Length in Nominal Feet)	827 830 835 840 850 927 930 935 940 950 TW2765 WD1827 RGBW¹	VL Very low L Low S Standard H High VH Very High	F Flood	VL Very low L Low S Standard H High VH Very High	F Flood B Batwing	1D 0-10V EldoLED 1% 01D 0-10V EldoLED 0.1% LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5% 1DT (TW) ² 1DW (WD) ² DMX8 Standard 8 bit (RGBW) ¹ DMX16 Optional 16 bit (RGBW) ¹ DALI (INTL) TWS (Sensor Fixtures) ³
		1. Power feed is always first section of a continuous run	1. 2ft & 3ft - must have same power output for up and down 1. Pair only w/ power level(s) = S, beams = F	1. 2ft & 3ft - must have same power output for up and down		1. 2ft & 3ft - must have same power output for up and down		1. Driver must reside in remote housing 2. 0-10V input - CHOOSE DALI instead for INTL versions 3. Integrated Sensor options pair with TWS driver only

HOUSING FINISH	END CAPS FINISH	OPTIONS ⁶
SC Satin Clear Anodize SW Satin White Powder Coat MB Matte Black Powder Coat CF Custom Finish (Consult Factory)	MF Machined Finish SW Satin White MB Matte Black CF Custom Finish (Consult Factory)	EMB7^{1,3,5,6} 7 Watt battery back-up (Approximately 600 lumens) EMB12^{1,4,5,6} 12 Watt battery back-up (Approximately 1000 lumens) EMW^{1,2} Emergency Circuit Wiring WSN⁶ WSN nLight sensor WSE⁶ WSE Enlighted Sensor WSW⁶ WSW Wavelinx Sensor WSL⁶ WSL Lutron Vive Sensor
		1. EMB/EMW only linked to first section of continuous run 2. EMW not available for 2ft/3ft lengths 3. EMB7 - 6ft and up 4. EMB12 - 7ft and up 5. EMB not available for combined 8ft length & VH power. 6. Factory EMB and Sensor (WS*) options not avail for INTL

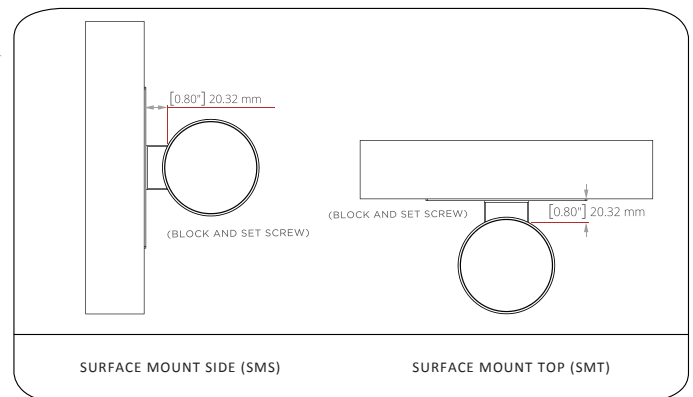

GENERAL NOTES:

All fixtures are UL listed for dry and damp locations. Fixtures with International (E) option designation are CE and ROHS compliant. **INTEGRAL DRIVER** for all options. Please contact the factory with any specification questions.



ECOSENSE

ECOSENSE LIGHTING INC.
 837 NORTH SPRING STREET
 SUITE 103
 LOS ANGELES, CA 90012

P • 310.496.6255
F • 310.496.6256
T • 855.632.6736
855.6.ECOSEN

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT ECOSENSELIGHTING.COM FOR THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT ECOSENSELIGHTING.COM/IP-PORTFOLIO/.
 ©2019 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. **ECOSENSE**, THE **ECOSENSE** LOGO, **TROV**, **TROV** AND **ECOSPEC** ARE REGISTERED TRADEMARKS OF ECOSENSE LIGHTING INC.
RISE™, **SLIM COVE™**, **FREEDOM TO CREATE™**, **MACRO™**, **FLIP-TO-FLAT™** ARE TRADEMARKS OF ECOSENSE LIGHTING INC.

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

BIDIRECTIONAL

STATIC WHITE | FLOOD DIRECT & FLOOD INDIRECT

POWER LEVELS	LIGHT DIRECT LM/4FT	LIGHT INDIRECT LM/4FT	TOTAL LIGHT LM/4FT	ENERGY WATTS/4FT	EFFICACY LPW	CCT/CRI
VL	2055	2169	4224	32	132	4000/80
L	2881	3040	5921	48	123	4000/80
S	3814	4025	7839	64	122	4000/80
H	4589	4843	9432	80	118	4000/80
VH	5535	5842	11377	96	119	4000/80

CCT MULTIPLIERS, STATIC WH		
CCT	80CRI	90CRI
2700K	0.93	0.79
3000K	0.96	0.82
3500K	0.97	0.85
4000K	1.00	0.89
5000K	1.01	0.89

DYNAMIC WHITE | FLOOD DIRECT & FLOOD INDIRECT

POWER LEVELS	LIGHT DIRECT LM/4FT	LIGHT INDIRECT LM/4FT	TOTAL LIGHT LM/4FT	ENERGY WATTS/4FT	EFFICACY LPW	CCT
VL	1442	1522	2965	48	62	4000/90
L	2022	2134	4156	64	65	4000/90
S	2677	2825	5502	72	76	4000/90
H	3221	3399	6620	88	75	4000/90
VH	3885	4101	7986	96	83	4000/90

CCT MULTIPLIERS, DYNAMIC WH	
CCT	90CRI
2700K	1.09
3000K	1.08
3500K	1.03
4000K	1.00
5000K	0.99
6500K	0.98

WARM DIM | FLOOD DIRECT & FLOOD INDIRECT

POWER LEVELS	LIGHT DIRECT LM/4FT	LIGHT INDIRECT LM/4FT	TOTAL LIGHT LM/4FT	ENERGY WATTS/4FT	EFFICACY LPW	CCT
VL	1514	1598	3113	48	65	2700/90
L	2123	2240	4363	64	68	2700/90
S	2810	2966	5776	72	80	2700/90
H	3381	3569	6950	88	79	2700/90
VH	4079	4305	8384	96	87	2700/90

CCT MULTIPLIERS, WARM DIM	
CCT	90CRI
1800K	0.02
2250K	0.17
2700K	1.00

RGBW | FLOOD DIRECT & FLOOD INDIRECT

POWER LEVELS	CHANNEL (S)	LIGHT DIRECT LM/4FT	LIGHT INDIRECT LM/4FT	TOTAL LIGHT LM/4FT	ENERGY WATTS/4FT	EFFICACY LPW	CCT
S	White	371	392.0	763	20	38	4000
S	All	858	906.0	1764	40	44	N/A


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

DIRECT

DIRECT OPTICS: LUMEN OUTPUT (PER 4FT)

TYPE	CCT/CRI	ENERGY WATTS/ 4FT	FLOOD LM/4FT	FLOOD LPW
STATIC WHITE	4000K/80	S (32W)	3814	119
DYNAMIC WHITE	4000K/90	S (36W)	2677	74
WARM DIM	2700K/90	S (36W)	2810	78
RGBW	ALL CHANNELS UP	S (20W)	858	43

FLOOD*



MAX CANDELA: 1093
DELIVERED LUMENS: 3814
WATTS: 32
LPW: 119

*Fixture Properties: 4ft Nominal
Length, Standard Output, Static
White 4000K/80CRI

CCT MULTIPLIERS STATIC WHITE

CCT	2700K		3000K		3500K		4000K		5000K	
CRI	80	90	80	90	80	90	80	90	80	90
MULTIPLIER	0.93	0.79	0.96	0.82	0.97	0.85	1	0.89	1.01	0.89

CCT MULTIPLIERS DYNAMIC WHITE

CCT	2700K	3000K	3500K	4000K	5000K	6000K
CRI	90	90	90	90	90	90
MULTIPLIER	1.09	1.08	1.03	1	0.99	0.98

CCT MULTIPLIERS WARM DIM

CCT	1800K	2250K	2700K
CRI	90	90	90
MULTIPLIER	0.02	0.17	1

POWER LEVEL MULTIPLIERS

POWER	VL	L	S	H	VH
STATIC WHITE	0.53	0.75	1	1.2	1.4
DYNAMIC WHITE	0.53	0.75	1	1.2	1.4
WARM DIM	0.53	0.75	1	1.2	1.4


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

INDIRECT

INDIRECT OPTICS: LUMEN OUTPUT (PER 4FT)

TYPE	CCT/CRI	ENERGY WATTS/4FT	FLOOD LM/4FT	FLOOD LPW
STATIC WHITE	4000K/80	S (32W)	4025	126
DYNAMIC WHITE	4000K/90	S (36W)	2825	78
WARM DIM	2700K/90	S (36W)	2966	82
RGBW	ALL CHANNELS UP	S (20W)	906	45

FLOOD*

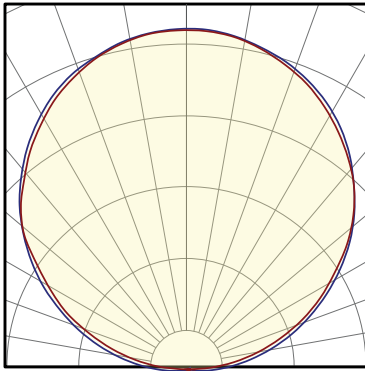

MAX CANDELA: 1190
DELIVERED LUMENS: 4025
WATTS: 32
LPW: 126

LUMINAIRE TOTAL LUMENS PER WATT

$$\frac{(\text{DIRECT LUMENS/FT} + \text{INDIRECT LUMENS/FT}) \times \text{FIXTURE TOTAL LINEAR FT}}{(\text{DIRECT WATTS/FT} + \text{INDIRECT WATTS/FT}) \times \text{FIXTURE TOTAL LINEAR FT}} = \text{TOTAL LUMINAIRE LUMENS PER WATT}$$

*Fixture Properties:
4ft Nominal
Length, Standard
Output, Static
White 4000K/80CRI

CCT MULTIPLIERS STATIC WHITE

CCT	2700K		3000K		3500K		4000K		5000K	
CRI	80	90	80	90	80	90	80	90	80	90
MULTIPLIER	0.93	0.79	0.96	0.82	0.97	0.85	1	0.89	1.01	0.89

CCT MULTIPLIERS DYNAMIC WHITE

CCT	2700K	3000K	3500K	4000K	5000K	6000K
CRI	90	90	90	90	90	90
MULTIPLIER	1.09	1.08	1.03	1	0.99	0.98


CCT MULTIPLIERS WARM DIM

CCT	1800K	2250K	2700K
CRI	90	90	90
MULTIPLIER	0.02	0.17	1

POWER LEVEL MULTIPLIERS


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

MOUNTING




CABLE SUSPENDED (CS)

This fixture can be a cable suspended down-light and up-light: Bi-Directional (CS), or can be special ordered as a cable suspended static down-light only: Direct Only (CSD). Aircraft cables come in 4ft and 8ft lengths and are field adjustable.




SURFACE MOUNT SIDE (SMS)

Surface Mount Side (SMS). The fixture is mounted on the wall using mounting brackets, giving a static bi-directional up-light and down-light.



CABLE SUSPENDED - ROTATIONAL (CSR)

Using a similar setup to the Cable Suspended system above, the Cable Suspended - Rotational system has 360 degree rotational capacity with mechanical fasteners to lock fixtures in place if desired. This system offers incredible flexibility, light direction control, and a dynamic aesthetic.




ROTATIONAL ARM MOUNT (RAM)

This system uses 3/4" diameter aluminum arms and subtle details in combination with a 360 degree rotational capacity to create some of the most versatile linear fixtures in the architectural market. Standard mounting uses 3/O mud rings (supplied by others). Engineered with no visible fasteners, smooth rotation, and mechanical locking, the RAM system reveals an impressive aesthetic with exceptional versatility.

CONTINUOUS RUN (CR)

This fixture has two continuous run connection options. Our single seam continuous run option offers smooth transitions from one section to the next. The joiner bracket and alignment pin system in this option, offers easy to use, confident, single seam connections with a tight fit.

Alternatively, our 360 degree rotational option enables individual sections to rotate independently of each other, which offers adjustable asymmetric light distribution capacity along with striking appearances such as alternating up/down fixtures or spiral transitions. The flexibility within the rotational option makes for infinite design and functional possibilities.

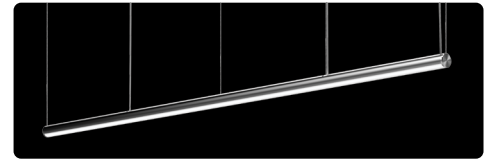

FIXTURE WITH SINGLE SEAM CONTINUOUS RUN



CONTINUOUS RUN ROTATIONAL



CONTINUOUS RUN ROTATIONAL (SPIRAL EFFECT)



CONTINUOUS RUN SINGLE SEAM



FIXTURE WITH CONTINUOUS RUN ROTATIONAL

CANOPIES

44




4" diameter power feed and 4" diameter non-power feed canopy.



41



4" diameter machined power feed and 1-1/4" diameter machined non-power feed canopy. Offers minimal ceiling treatment while maintaining the ability to cover mistakes. Requires a 1/4-20 stud securely fastened to the ceiling.



40



4" diameter machined power feed canopy and no canopy on the non-power feed side. Minimal aesthetic. Requires a 1/4-20 stud securely attached to the ceiling.



44E, 41E, 40E (**E) International Canopy













INTL POWERFEED CANOPY FOR INTEGRAL DRIVER FIXTURES

This powerfeed canopy replaces the flat style canopy from the North American mounting style (44, 41, & 40) versions pictured)

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

COLOR AND FINISH

Standard luminaire housing finishes are Satin Clear anodized, Matte Black powder coat, and Satin White powder coat. Standard hardware (end caps, knuckles, cover plates, etc.) finishes are Machined Finish, Matte Black powder coat, & Satin White powder coat. Custom anodizing and powder coated finishes are available as well. If you have a particular color/finish treatment in mind, please contact the factory and we will do our best to accommodate your project needs.

STANDARD			CUSTOM			
LUMINAIRE						
						
SATIN CLEAR ANODIZING	MATTE BLACK	SATIN WHITE	BRONZE	COLOR ANODIZE	SPECULAR	RAL COLORS
HARDWARE						
						
MACHINED COMPONENTS	MATTE BLACK	SATIN WHITE				

SENSORS

Optional fixture integrated sensors and controls offer wireless control system compatibility directly from the factory. Lumium luminaires are now available with integrated control gear from 4 major partners.



NOTE: Information on this Spec Sheet is subject to change, please visit www.ecosenselighting.com for the most updated information.

ECOSENSE

ECOSENSE LIGHTING INC.
837 NORTH SPRING STREET
SUITE 103
LOS ANGELES, CA 90012

P • 310.496.6255
F • 310.496.6256
T • 855.632.6736
855.6.ECOSEN

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT ECOSENSELIGHTING.COM FOR THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT ECOSENSELIGHTING.COM/IP-PORTFOLIO/
©2019 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE, THE ECOSENSE LOGO, TROV, TROV AND ECOSPEC ARE REGISTERED TRADEMARKS OF ECOSENSE LIGHTING INC.
RISE™, SLIM COVE™, FREEDOM TO CREATE™, MACRO™, FLIP-TO-FLAT™ ARE TRADEMARKS OF ECOSENSE LIGHTING INC.