

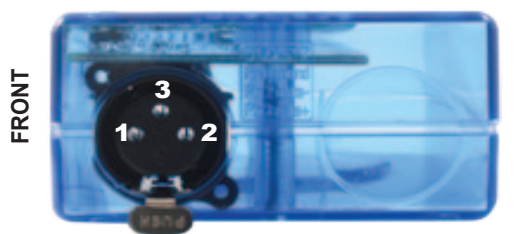


DMX Live control and Stand Alone controller



- USB connection
- 512 DMX512 channels universe in live mode (computer)
- 256 DMX512 channels universe in stand alone
- 8 dry contact trigger ports via HE10 connector
- stand alone mode with 1 area and 20 scenes

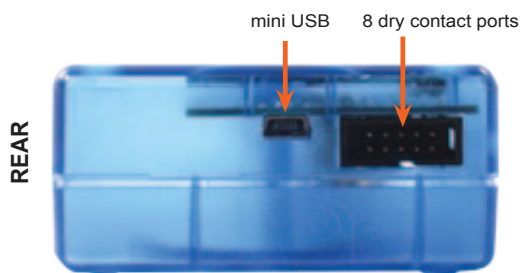


- 1 DMX1 ground
- 2 DMX1 data-
- 3 DMX1 data+

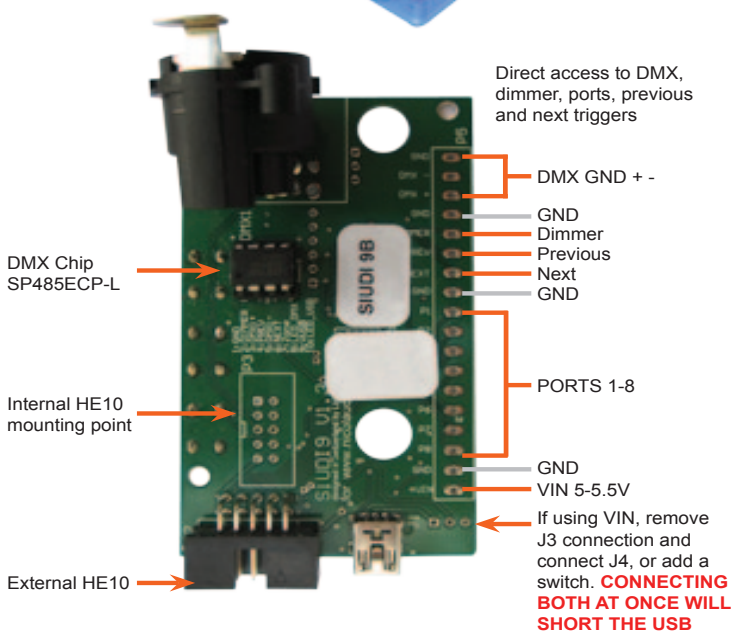


SPECIFICATIONS	
Package	Interface, cdrom, usb cable
OS Requirement	Mac OSx 10.6/10.7/10.8 - Windows XP/VISTA/SEVEN/8 32/64 bits and USB 2.0
Colors	Blue, Orange, Gray, Green, Marine, White, Red
Connections	XLR3, mini USB, 1 HE10
Power	Power From 5V to 5.5V DC (AC/DC adapter in option, ref: POWER1_EU)
Certifications	EC, EMC, ROHS, ETL, UL (some are in progress)
Interface	79x92x43 mm 90g
Package	140x135x50 mm 290g
Use	Environment IP20 Temperature 0°C to 50°C
Buttons	2 buttons to change scene (previous/next) + 1 button to change dimmer

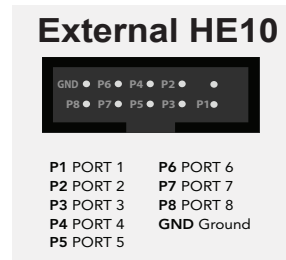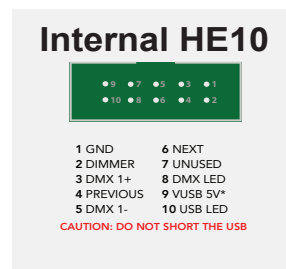


sixteen5hundred	Project 21-12877-2 Date 6/24/2021	Catalog Number SLESA U9	Type
	DMX Controls Submitted By 16500, INC	Notes	

 siudi <small>SUNLITE INTELLIGENT USB DMX INTERFACE</small>	Sunlite Intelligent Usb Dmx Interface	Ref. SIUDI-9B	Page 2/2
	Technical datasheet	Revision date 30 JULY 2013	www.nicolaudie.com Version 1.0

LIVE USE WITH COMPUTER

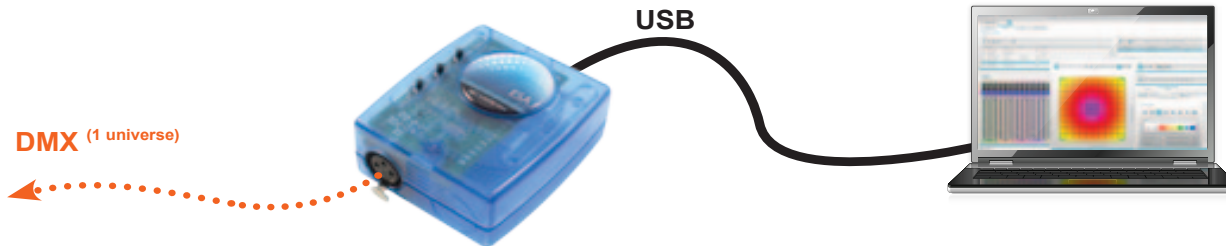

STAND ALONE USE

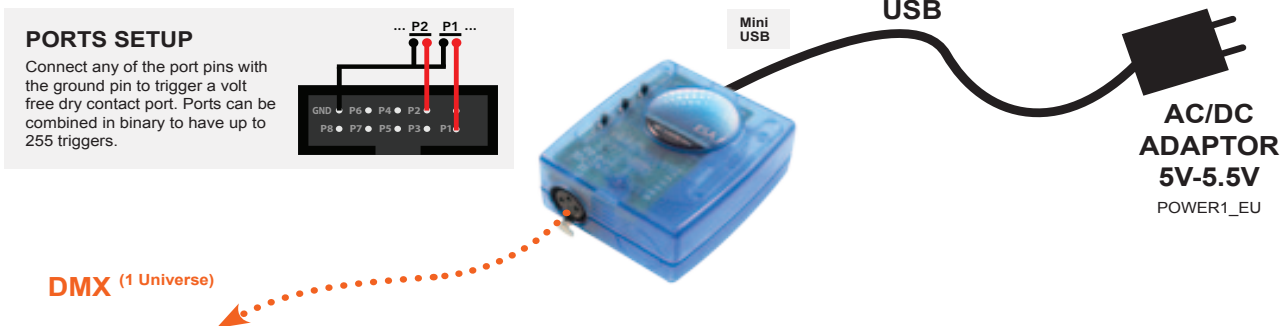

SOFTWARE TOOLS.EXE to set parameters



TOOLS TABS

Interface

Displays the serial number and firmware version

Stand Alone

Set the interface to stand alone mode

Firmware

Write the latest firmware

Test

Test DMX outputs and ports

Parameters


Adjust special parameters

Dmx Timing

Adjust DMX output signal

Nicolaudie software


- Easy Stand Alone software (PC)
- ESA2 software (PC & Mac)

	Project 21-12877-2 Date 6/24/2021 DMX Controls Submitted By 16500, INC	Catalog Number SLESAU9 Notes	Type
--	---	------------------------------------	------


	Sunlite Intelligent Usb Dmx Interface Technical datasheet	Ref. SIUDI-9B Revision date 30 JULY 2013 www.nicolaudie.com	Page 1/2 Version 1.0
---	--	--	--------------------------------

DMX Live control and Stand Alone controller



- USB connection
- 512 DMX512 channels universe in live mode (computer)
- 256 DMX512 channels universe in stand alone
- 8 dry contact trigger ports via HE10 connector
- stand alone mode with 1 area and 20 scenes

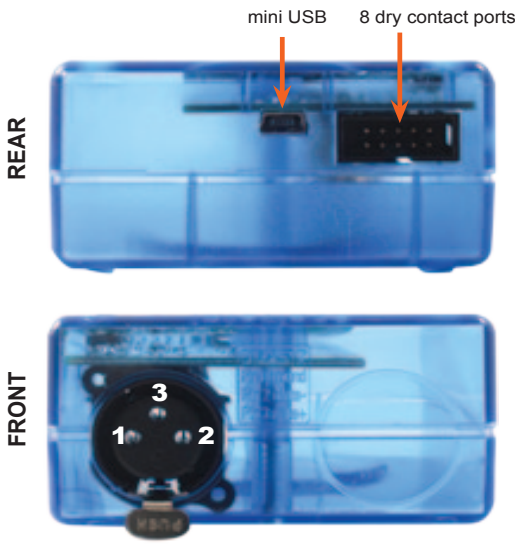


- 1 DMX1 ground
- 2 DMX1 data-
- 3 DMX1 data+

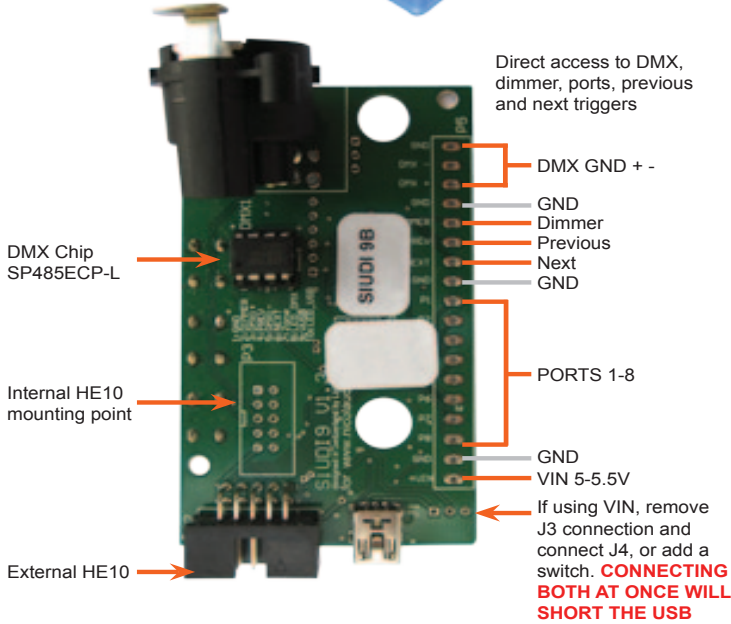


SPECIFICATIONS	
Package	Interface, cdrom, usb cable
OS Requirement	Mac OSx 10.6/10.7/10.8 - Windows XP/VISTA/SEVEN/8 32/64 bits and USB 2.0
Colors	Blue, Orange, Gray, Green, Marine, White, Red
Connections	XLR3, mini USB, 1 HE10
Power	Power From 5V to 5.5V DC (AC/DC adapter in option, ref: POWER1_EU)
Certifications	EC, EMC, ROHS, ETL, UL (some are in progress)
Interface	79x92x43 mm 90g
Package	140x135x50 mm 290g
Use	Environment IP20 Temperature 0°C to 50°C
Buttons	2 buttons to change scene (previous/next) + 1 button to change dimmer

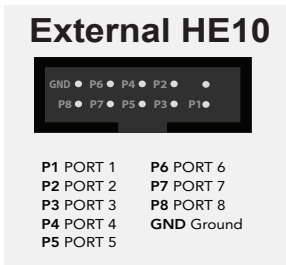


sixteen5hundred	Project 21-12877-2 Date 6/24/2021 DMX Controls	Catalog Number SLESAU9	Type
	Submitted By 16500, INC	Notes	

 siudi <small>SUNLITE INTELLIGENT USB DMX INTERFACE</small>	Sunlite Intelligent Usb Dmx Interface	Ref. SIUDI-9B	Page 2/2
	Technical datasheet	Revision date 30 JULY 2013	www.nicolaudie.com


LIVE USE WITH COMPUTER

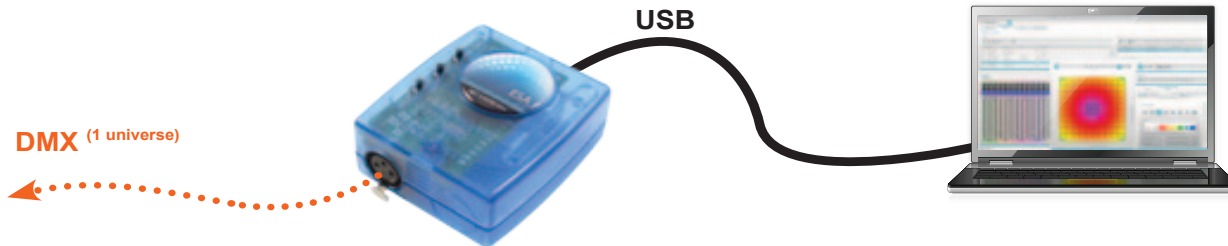

STAND ALONE USE

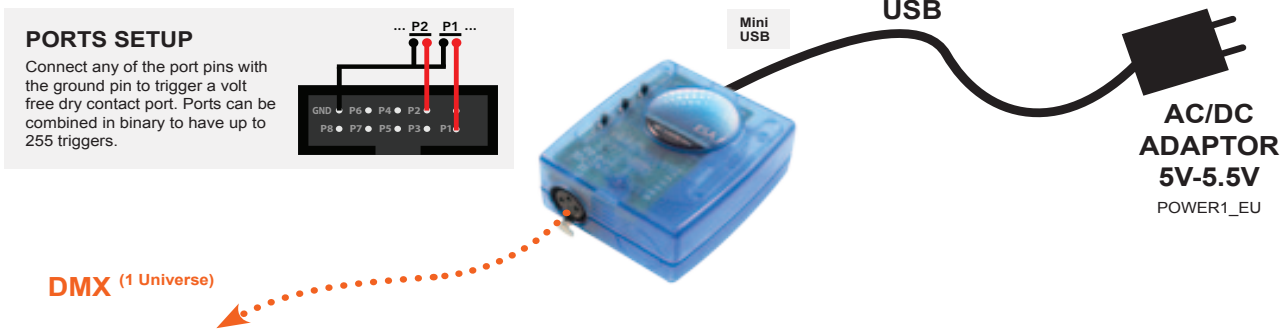

SOFTWARE TOOLS.EXE to set parameters

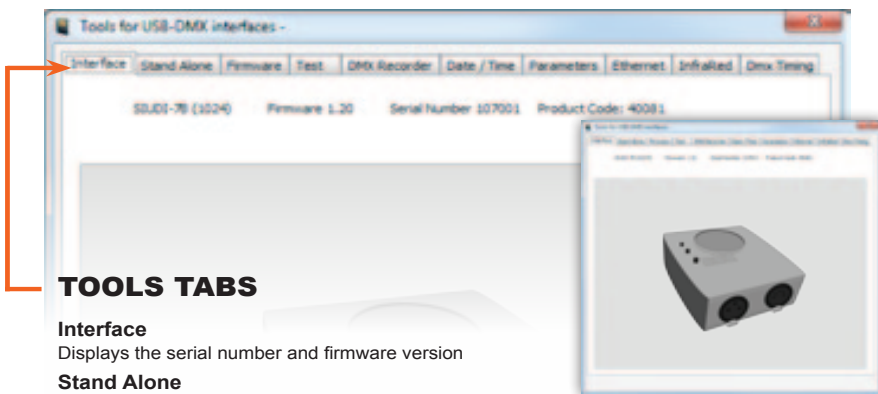

TOOLS TABS

Interface

Displays the serial number and firmware version

Stand Alone

Set the interface to stand alone mode

Firmware

Write the latest firmware

Test

Test DMX outputs and ports

Parameters

Adjust special parameters

Dmx Timing

Adjust DMX output signal

Nicolaudie software

- Easy Stand Alone software (PC)
- ESA2 software (PC & Mac)