




SIGNWAVE® 7 (INDOOR/OUTDOOR)

SW7-SERIES | PIXEL CONTROL
FLEXIBLE LIGHTING SYSTEM

Fixture Type: _____

Project: _____

Location: _____


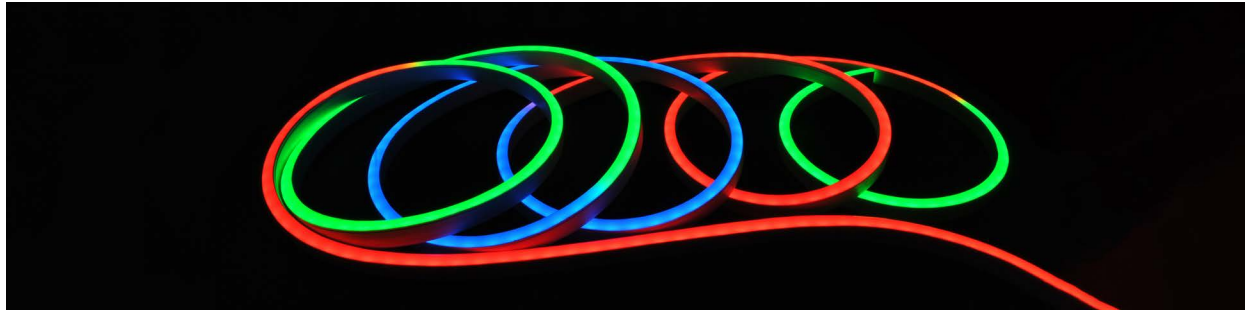


PRODUCT FEATURES

- Digital pixel control RGB
- Dimmable
- 50,000 hour life
- Domed profile for large beam angle
- UL-listed for indoor and outdoor use
- IP67 or IP68 option
- Factory-installed power feed
- Injection-molded flush end caps
- For use with 24V power supplies

SPECIFICATIONS


Series	SW7 - Signwave® 7
Input Voltage	24V DC
Lumens	162 Lm/ft Red / Green / Blue
Wattage	3.7W/ft
Max Run Length	26 ft / 63 pixels
Beam Angle	320°
Dimensions	0.438" (11.5mm) × 1.125" (29mm)
Production Intervals	4.938" (125mm)
Pixel Length	4.938" (125mm)
Control Options	SPI, UCS 2903 IC
Temp Range	-4°F (-20°C) to 113°F (45°C)

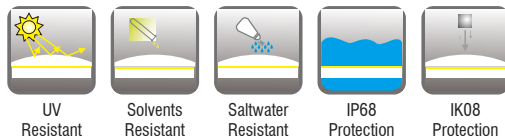

DryWire ferrule located 115mm from the cable connector. Protects against damage from water ingress inside cable wire.

Included in every run.

DOME PROFILE DIMENSIONS

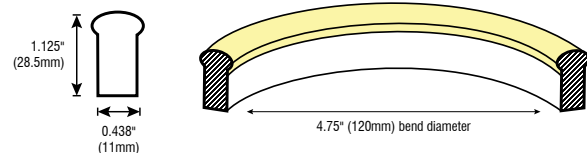

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0







SIGNWAVE® 7 (INDOOR/OUTDOOR)

SW7-SERIES | PIXEL CONTROL | FLEXIBLE LIGHTING SYSTEM

IP67 OPTIONS

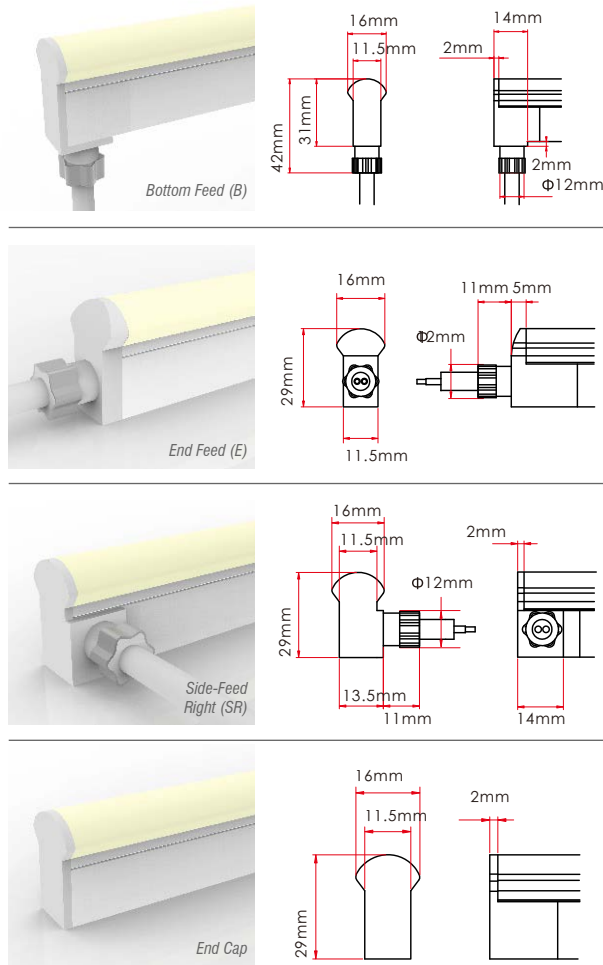

IP68 OPTIONS

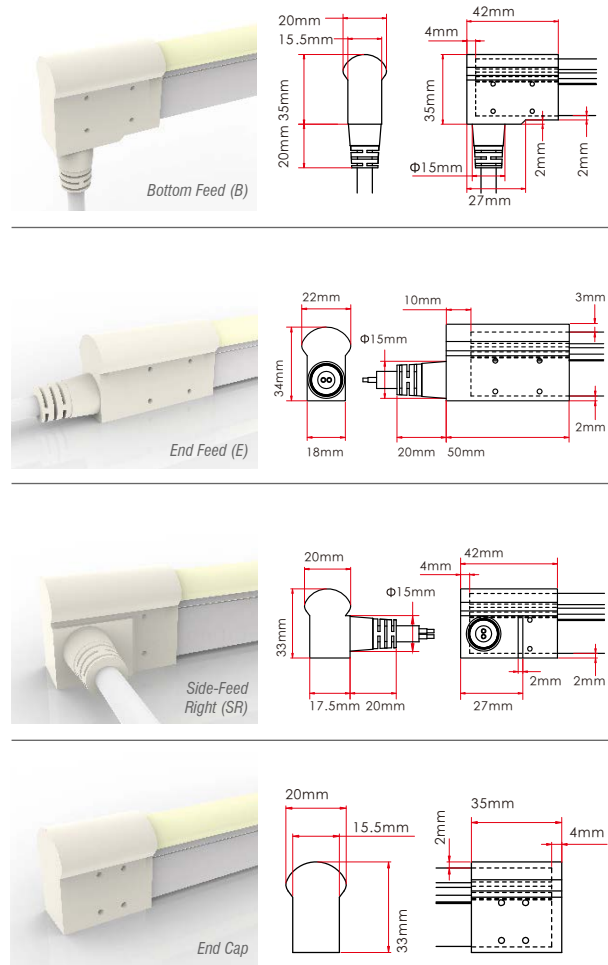

ORDERING INFORMATION

Example: **SW7-72-TX-SL-72-IP68**



Series	Length (Unlimited)	Color	Feed Point	Feed Length	Rating
SW7		TX			
SW7	Inches	TX - Pixel Control	B - Bottom Feed SL - Side-Feed Left SR - Side-Feed Right E - End Feed	S - Standard (118 inch) Inches - Custom length (inches).	IP67 IP68



SIGNWAVE® WIDE VIEW ACCESSORIES



FOR SIGNWAVE™ 1, 2, 5, & 7 SERIES

ALUMINUM SERRATED CHANNEL

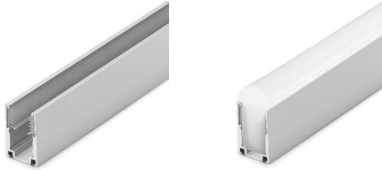



Model	SW-E-AL-CH-SR-2M
Material	Aluminum
Length	78.75" (2m)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)

ALUMINUM SERRATED CLIP

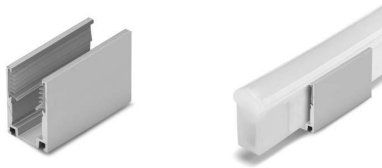

Model	SW-E-CLP-AL-SR
Material	Aluminum
Length	0.79" (20mm)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)

ALUMINUM SERRATED FLEX CHANNEL

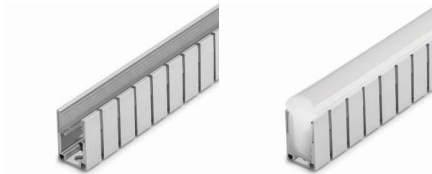


Model	SW-E-CH-AL-FLX-1M
Material	Aluminum
Length	39.3" (1m)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)



SIGNWAVE® WIDE VIEW ACCESSORIES



FOR SIGNWAVE™ 1, 2, 5, & 7 SERIES

ALUMINUM CHANNEL




Model	SW-E-CH-AL-2M
Material	Aluminum
Length	78.75" (2m)
Width	0.64" (16.4mm)
Height	1.0" (25.6mm)
Internal Width	0.45" (11.5mm)

ALUMINUM CLIP

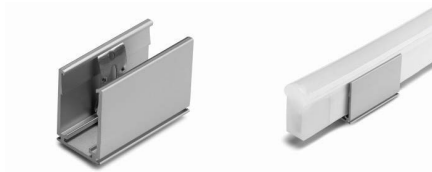

Model	SW-E-CLP-AL
Material	Aluminum
Length	1.5" (38.1mm)
Width	0.64" (16.2mm)
Height	1.0" (25.6mm)
Internal Width	0.45" (11.5mm)

SIDE MOUNTING BRACKET



Model	SW-CLP-RA
Material	Aluminum
Length	0.78" (20mm)
Width	0.98" (25mm)
Height	2.75" (70mm)