



date _____
customer _____
project _____
quantity _____

LINE GRAZER Luminaire



Line Grazer® is a linear lighting wall washer with a robust aluminium housing and a UV resistant glass cover. The product suits perfectly for highlighting outdoor and indoor applications offering powerful and efficient wall washing effects and providing a high environmental protection grade (IP66) as well as impact resistance (IK09).

Line Grazer® is available in a range of monochromatic or color changing temperatures, controlled via DMX. Also a wide range of beam angles and mounting options are available.






- Homogenous light for wall washing applications
- High efficiency up to 4800 lm
- 5 beam angles: 9°, 28°, 45°, 10°x 54°, Asym.
- Surfaced or recessed mounted
- Easy serial connection
- Thermal

Family	Model / Wattage / Length	Finish	Application	Bracket Mounting	Color temp	Beam	Driver	Input voltage
LG								
	300 18W 11.8"	S silver	S surface	SB side bracket	80/2K8 2800K	9 9 degree	N * ON / OFF	120 120V input
	600 30W 23.6"	B black	R recessed	HB high bracket	80/4K 4000K	10x54 standard	D DMX	277 277V input
	900 43W 35.4"	W white		LB low bracket	80/6K 6000K	28 28 degree		
	1200 55W 47.2"			WB **w/out bracket	2K8-6K smart white	45 45 degree		
					09 blue	16-60 asymmetric		
					11 RGB			
					11-4K RGBW (4000K)			

Notes:
 (*) ON / OFF - FOR 2800K / 4000K / 6000K MONOCOLOR ONLY
 (**) For recessed version

example...

Family	Model / Wattage / Length	Finish	Application	Color temp	Beam	Driver	Input voltage
LG	1200 55W 47.2"	S	SB	80/4K 4000K	10x54 standard	N * ON / OFF	120 120V input

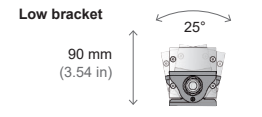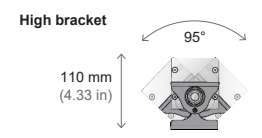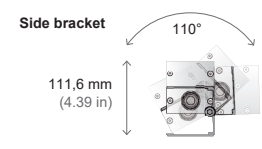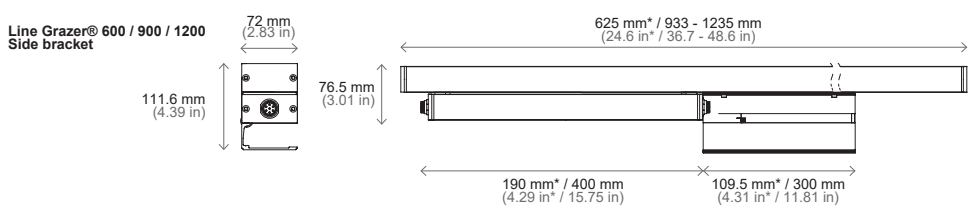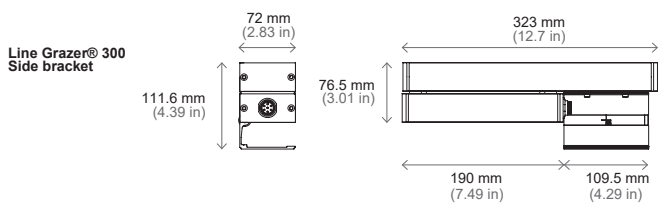



LINE GRAZER Luminaire

Line Grazer [®] 1200							
Measures	48.6" x 4.4" x 2.8" (1235 x 111.6 x 72 mm)						
Weight	9.9lb (4.5 kg)						
48 LEDs pitch 1.0" (25 mm)							
Power	55 W						
Color temperatures	2800 K	4000 K	6000 K	DW (Dynamic white)	Blue	RGB	RGBW
Lumens output	9° - 3706 lm 28° - 3547 lm 45° - 3228 lm 10°x54° - 3467 lm Asym. - 3308 lm	9° - 4240 lm 28° - 4058 lm 45° - 3693 lm 10°x54° - 3967 lm Asym. - 3785 lm	9° - 4834 lm 28° - 4626 lm 45° - 4210 lm 10°x54° - 4522 lm Asym. - 4314 lm	9° - 4260 lm 28° - 4077 lm 45° - 3710 lm 10°x54° - 3985 lm Asym. - 3802 lm	9° - 1298 lm 28° - 1242 lm 45° - 1130 lm 10°x54° - 1214 lm Asym. - 1158 lm	9° - 2544 lm 28° - 2435 lm 45° - 2216 lm 10°x54° - 2380 lm Asym. - 2270 lm	9° - 3117 lm 28° - 2983 lm 45° - 2714 lm 10°x54° - 2916 lm Asym. - 2782 lm
Luminaire efficacy	59 to 67 lm/W	67 to 77 lm/W	76 to 88 lm/W	68 to 78 lm/W	20 to 24 lm/W	40 to 46 lm/W	49 to 57 lm/W

LineGrazer [®] 900							
Measures	36.7" x 4.4" x 2.8" (933 x 111.6 x 72 mm)						
Weight	3.5 kg						
36 LEDs pitch 1.0" (25 mm)							
Power	43 W						
Color temperatures	2800 K	4000 K	6000 K	DW (Dynamic white)	Blue	RGB	RGBW
Lumens output	9° - 2780 lm 28° - 2660 lm 45° - 2420 lm 10°x54° - 2600 lm Asym. - 2480 lm	9° - 3180 lm 28° - 3044 lm 45° - 2770 lm 10°x54° - 2975 lm Asym. - 2838 lm	9° - 3625 lm 28° - 3470 lm 45° - 3158 lm 10°x54° - 3392 lm Asym. - 3236 lm	9° - 3194 lm 28° - 3057 lm 45° - 2782 lm 10°x54° - 2988 lm Asym. - 2851 lm	9° - 974 lm 28° - 932 lm 45° - 848 lm 10°x54° - 911 lm Asym. - 869 lm	9° - 1908 lm 28° - 1826 lm 45° - 1662 lm 10°x54° - 1785 lm Asym. - 1703 lm	9° - 2337 lm 28° - 2237 lm 45° - 2035 lm 10°x54° - 2187 lm Asym. - 2086 lm
Luminaire efficacy	56 to 65 lm/W	64 to 74 lm/W	73 to 84 lm/W	65 to 74 lm/W	20 to 23 lm/W	39 to 44 lm/W	48 to 54 lm/W

Line Grazer [®] 600							
Measures	24.6" x 4.4" x 2.8" (625 x 111.6 x 72 mm)						
Weight	4.4lb (2.0 kg)						
24 LEDs pitch 1.0" (25 mm)							
Power	30 W						
Color temperatures	2800 K	4000 K	6000 K	DW (Dynamic white)	Blue	RGB	RGBW
Lumens output	9° - 1852 lm 28° - 1773 lm 45° - 1613 lm 10°x54° - 1735 lm Asym. - 1655 lm	9° - 2120 lm 28° - 2029 lm 45° - 1846 lm 10°x54° - 1983 lm Asym. - 1892 lm	9° - 2417 lm 28° - 2313 lm 45° - 2105 lm 10°x54° - 2261 lm Asym. - 2157 lm	9° - 2130 lm 28° - 2038 lm 45° - 1855 lm 10°x54° - 1992 lm Asym. - 1901 lm	9° - 650 lm 28° - 622 lm 45° - 566 lm 10°x54° - 608 lm Asym. - 580 lm	9° - 1272 lm 28° - 1217 lm 45° - 1108 lm 10°x54° - 1190 lm Asym. - 1135 lm	9° - 1558 lm 28° - 1491 lm 45° - 1357 lm 10°x54° - 1458 lm Asym. - 1390 lm
Luminaire efficacy	54 to 62 lm/W	62 to 71 lm/W	70 to 81 lm/W	62 to 72 lm/W	19 to 22 lm/W	37 to 42 lm/W	45 to 52 lm/W

Line Grazer [®] 300							
Measures	12.7" x 4.4" x 2.8" (323 x 111.6 x 72 mm)						
Weight	2.6lb (1.2 kg)						
12 LEDs pitch 1.0" (25 mm)							
Power	18 W						
Color temperatures	2800 K	4000 K	6000 K	DW (Dynamic white)	Blue	RGB	RGBW
Lumens output	9° - 927 lm 28° - 887 lm 45° - 810 lm 10°x54° - 870 lm Asym. - 825 lm	9° - 1060 lm 28° - 1015 lm 45° - 923 lm 10°x54° - 992 lm Asym. - 946 lm	9° - 1208 lm 28° - 1156 lm 45° - 1052 lm 10°x54° - 1130 lm Asym. - 1078 lm	9° - 1065 lm 28° - 1115 lm 45° - 927 lm 10°x54° - 995 lm Asym. - 950 lm	9° - 325 lm 28° - 312 lm 45° - 284 lm 10°x54° - 305 lm Asym. - 290 lm	9° - 638 lm 28° - 610 lm 45° - 555 lm 10°x54° - 596 lm Asym. - 569 lm	9° - 779 lm 28° - 746 lm 45° - 675 lm 10°x54° - 730 lm Asym. - 695 lm
Luminaire efficacy	46 to 52 lm/W	51 to 59 lm/W	58 to 68 lm/W	52 to 59 lm/W	16 to 18 lm/W	31 to 35 lm/W	38 to 43 lm/W