



date	
customer	
project	
quantity	

LedFloodStrip® DOTFREE is a linear lighting range for indoor and outdoor (IP66) applications designed to provide decorative lighting effects which are mainly characterized by its small size, low power consumption and easy installation.

The linear lightings fixture is made of an anodized aluminum body with a milky diffuser. The union between luminaries is through male-female connection.

LedFloodstrip® DOTFREE provide new details such as ESCHA (IP66) connectors and the new aluminum profile which offers the possibility to rotate the luminaries up to 180°.



example...

Family	Model / Length	Color Temp	Mounting	Driver	IP Rating	Input voltage
LFS	C1 1000 39.4in	80/3K 3000K	C CLIP --- STANDARD	N non dim	66 IP66	24 24VDC input

Family	Model / Length	Color Temp	Mounting	Driver	IP Rating	Input voltage	Run Length
LFS							* Advise on Run Length
	C1 1000 39.4in	80/2K7 2700K	C CLIP --- STANDARD	N non dim	66 IP66	24 24VDC input	
	C2 750 29.5in	80/3K 3000K	NAB NON ADJUSTABLE BASE	D DMX			
	C3 500 19.7in	80/4K 4000K	SB SWIVEL BASE	A 0-10V			
	C4 250 9.84in	80/6K 6000K					
		RGB					
		RGBW					
		RGB + (4000K)					




N, A, D

* max continuous run cannot exceed 96 watts


MEASURES

LedFloodStrip® I Dotfree (Not adjustable) with clip

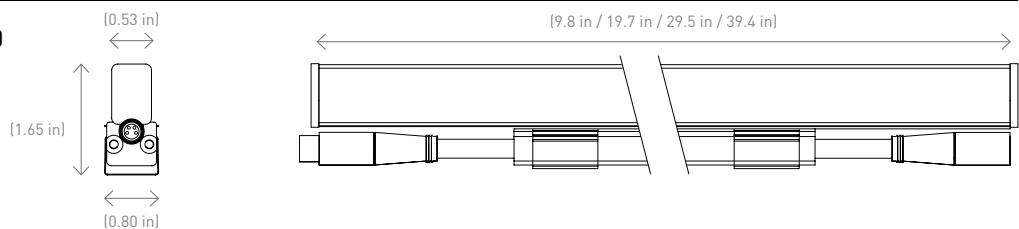


BRACKETS


LedFloodStrip® I Dotfree clip



LedFloodStrip® I Dotfree not adjustable base




LedFloodStrip® I Dotfree swivel base

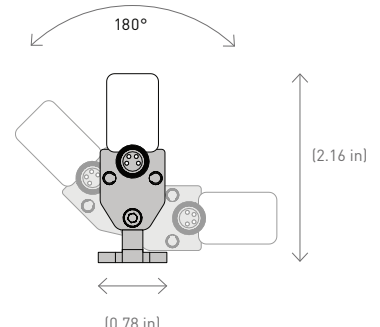

LED FLOOD STRIPS

LedFloodStrip® I Dotfree
with clip

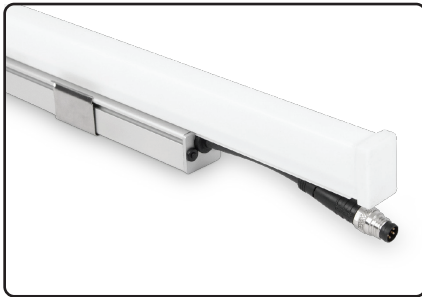

LedFloodStrip® I Dotfree
with non-adjustable base



LedFloodStrip® I Dotfree
with swivel base



LedFloodStrip® I Dotfree													
1000 mm													
Power	17,6 W (80 LEDs)				19,2 W (80 LEDs)				24 W (80 LEDs)				
Color temperature	2700K	3000K	4000K	6000K	RGB				RGBW				
					R	G	B	R+G+B	R	G	B	4000K	R+G+B+W
Lumens output	891 lm	940 lm	990 lm	1089 lm	120 lm	340 lm	80 lm	540 lm	252 lm	408 lm	60 lm	340 lm	1060 lm
Luminaire efficiency	51 lm/W	53 lm/W	56 lm/W	62 lm/W	28 lm/W				44 lm/W				
Measures / Weight	1000 x 42 x 26 mm / 660 gr												
750 mm													
Power	13,2 W (60 LEDs)				14,4 W (60 LEDs)				18 W (60 LEDs)				
Color temperature	2700K	3000K	4000K	6000K	RGB				RGBW				
					R	G	B	R+G+B	R	G	B	4000K	R+G+B+W
Lumens output	669 lm	706 lm	743 lm	817 lm	90 lm	225 lm	60 lm	405 lm	189 lm	306 lm	45 lm	255 lm	795 lm
Luminaire efficiency	51 lm/W	53 lm/W	56 lm/W	62 lm/W	28 lm/W				44 lm/W				
Measures / Weight	750 x 42 x 26 mm / 540 gr												
500 mm													
Power	8,8 W (40 LEDs)				9,6 W (40 LEDs)				12 W (40 LEDs)				
Color temperature	2700K	3000K	4000K	6000K	RGB				RGBW				
					R	G	B	R+G+B	R	G	B	4000K	R+G+B+W
Lumens output	446 lm	470 lm	495 lm	544 lm	60 lm	170 lm	40 lm	270 lm	126 lm	204 lm	30 lm	170 lm	530 lm
Luminaire efficiency	51 lm/W	53 lm/W	56 lm/W	62 lm/W	28 lm/W				44 lm/W				
Measures / Weight	500 x 42 x 26 mm / 405 gr												
250 mm													
Power	4,4 W (20 LEDs)				4,8 W (20 LEDs)				6 W (20 LEDs)				
Color temperature	2700K	3000K	4000K	6000K	RGB				RGBW				
					R	G	B	R+G+B	R	G	B	4000K	R+G+B+W
Lumens output	223 lm	236 lm	248 lm	273 lm	30 lm	85 lm	20 lm	135 lm	63 lm	102 lm	15 lm	85 lm	265 lm
Luminaire efficiency	51 lm/W	53 lm/W	56 lm/W	62 lm/W	28 lm/W				44 lm/W				
Measures / Weight	250 x 42 x 26 mm / 280 gr												