


# Uno circles, direct

LED direct circular pendant with frosted acrylic diffuser



### CONSTRUCTION

- Extruded aluminum outer housing
- Direct white frosted acrylic diffuser.
- 8 ft. gray or white 18 AWG adjustable power cord and AC cables. Push button grippers supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers and DMX module installed in surface mount canopy. For remote driver installation, see below.
- cUL listed for dry locations only.
- Nominal diameters, right. For actual diameters (in.), see p. 2.

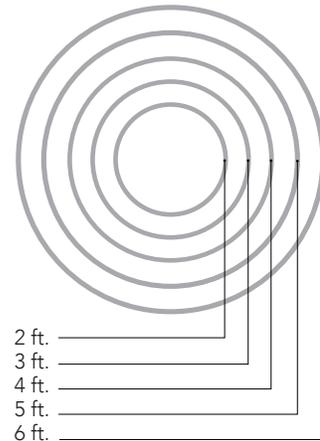

<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	


MODEL#	FINISH	LEDS	MOUNT STYLE	DIMMING	OPTION	
UC2-2 ft. UC3-3 ft. UC4-4 ft. UC5-5 ft. UC6-6 ft.	S-Silver W-White K-Black	BW-Barn Wood CB-Carbon Fiber ES-Espresso HO-Honey Oak M-Maple SD-Silver Driftwood SL-Saddle Leather	DC-Dark Cherry TL-Tan Leather KL-Khaki Leather	W30 W35 W40 Red Blue SQ-RGB	S-Separate SR-Separate Remote CS-Central Standard CR-Central Remote NCR-Nexus CR	D BDIM-W11 EM-Emergency

Example:


UC6	CB	W35	SR	D	
-----	----	-----	----	---	--

BTRAXW-Traxon Light Drive (enter quantity)	XP-Extra power cord (in inches, 25 ft. max.)
XL-custom lumen reduction (specify lumens)	


### MOUNT STYLES




S - Separate




SR - Separate Remote




NCR - Nexus Central Remote



CS - Central Standard



CR - Central Remote



Cross Section

# Uno circles, direct

LED direct circular pendant frosted acrylic diffuser



## WHITE LEDS

Nichia Corp. NFSL757 tight bin chips on aluminum boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin.

## COLOR LEDS

Flexible 5050 tapelights. Specify **R**–Red, **B**–Blue, or **SQ**–RGB Sequencer. **SQ** includes **BDMXMOD**–DMX 512 RGB interface; or order **BTRAXW**–Traxon Light Drive DMX wall box separately.\*\*

12V constant voltage driver for single color, 24V for RGB sequencer.

## DIMMING

- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off. Remote (**SR**, **CR**, **NCR**) install only.

## CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

## DIAMETER / WATTS / LUMENS / WEIGHT

DIAMETER: NOMINAL (ACTUAL)	WATTS	DELIVERED LUMENS	WEIGHT (lb.)
2 ft. (25.10 in.)	26	2,166	7
3 ft. (35.10 in.)	39	3,250	14
4 ft. (45.10 in.)	52	4,333	16
5 ft. (65.10 in.)	65	5,416	18
6 ft. (80.10 in.)	78	6,500	20

## REMOTE DRIVERS


For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).




Remote Driver Canopy  
3.8 x 0.45 in.

**SR** – Separate mount driver installation.

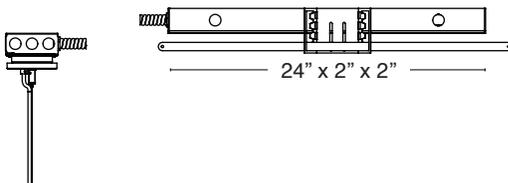


**NOTE:** Multiple drivers must be mounted no less than four inches apart side-by-side, and one inch apart end-to-end, to prevent overheating.

**CR** – Central mount remote driver installation.

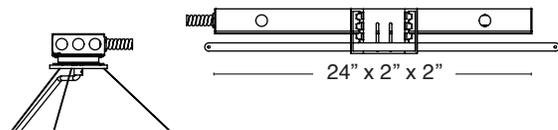

**EM** – Emergency. T-bar install shown, below. Battery pack provides 10W for 90 minutes. Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

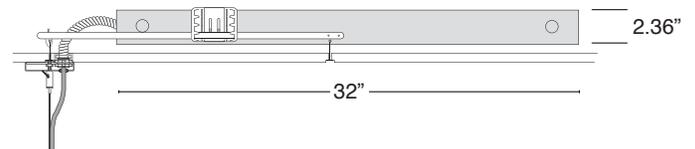

## TRAXON/OSRAM LIGHT DRIVE\*\*

**BTRAXW**–white faceplate

- Standalone, wall-mounted (12V power supply included) DMX controller for RGBW LED that provides direct access to fixtures.
- Tune color and brightness with the Light-Drive wheel.
- Fully dimmable white mode button.
- See <http://www.osram.com/ecue> for details.

## AIRCRAFT CABLE

**NOTE:** Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

## ACRYLIC DIFFUSER CLEANING



**WARNING:** Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

# Uno circles, direct


LED direct circular pendant frosted acrylic diffuser



## PAINT FINISHES

SWATCH	FINISH NO.
	<b>S-Silver</b>
	<b>W-white</b>
	<b>K-Black</b>

## TEXTURED FINISHES

SWATCH	FINISH NO.
	<b>BW-Barnwood</b>
	<b>CB-Carbon Fiber</b>
	<b>ES-Espresso</b>
	<b>HO-Honey Oak</b>
	<b>M-Maple</b>
	<b>SD-Silver Driftwood</b>
	<b>SL-Saddle Leather</b>

## PREMIUM TEXTURED FINISHES

SWATCH	FINISH NO.
	<b>DC-Dark Cherry</b>
	<b>TL-Tan Leather</b>
	<b>KL-Khaki Leather</b>