




SHOCKWAVE ALFA | WHITE SERIES

The SACO Shockwave ALFA is a stylish, compact, wall-grazing or wall-washing fixture using high-performance LEDs to deliver intense and precise light, from cool to warm white. The ALFA is highly adjustable and is great end-to-end, stacked, or positioned around complex structures.

ALFA comes in narrow, medium, wide, and a variety of oval optic options making this a versatile lighting solution for most projects.

HIGH RESOLUTION	SACO's proprietary V-STREAM high-speed, high-resolution video pixel control. DMX compatible.
BRIGHT FIXTURE	SACO's intelligent control maximizes output for the brightest whites.
COMPACT SIZE	Ultra-compact design and remote V-BRAIN power allows for low-profile installation and discreet integration.
MODULAR	Build the perfect performer by combining and stacking fixtures to suit.
HEAT MANAGEMENT	Efficient heat dissipation. No dirt traps.

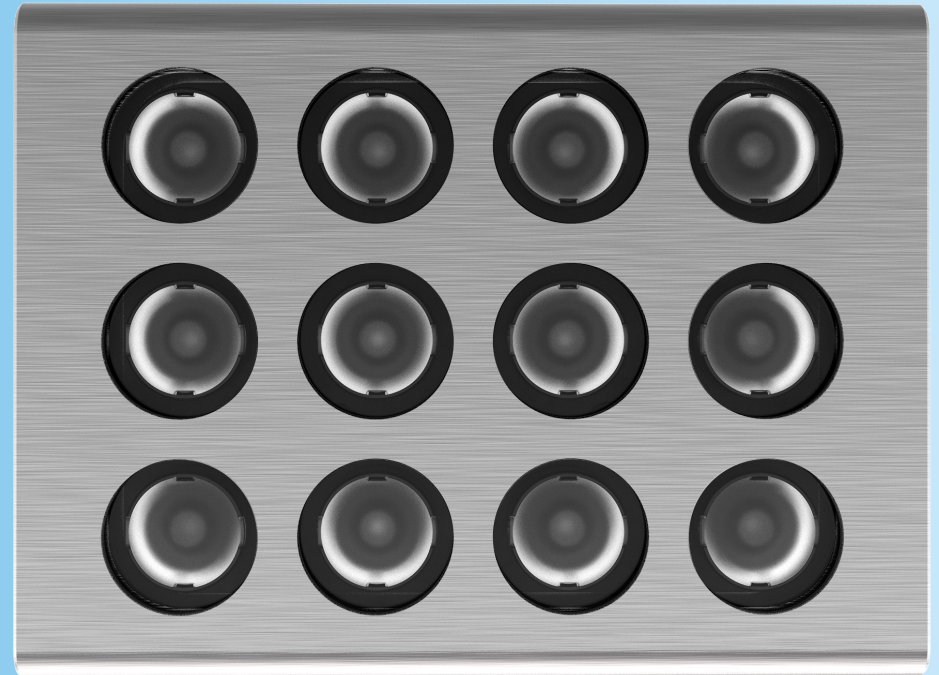

ACTUAL SIZE

SACO



FEATURES GUIDE



PHYSICAL

CONSTRUCTION	Machined high grade 6061-T6 aluminum Machined scratch resistant clear polycarbonate face (0.2", 4.5mm thickness) Sturdy stainless steel hardware High-pressure silicone rubber seal (temp range -60°F to 400°F, -50°C to 200°C)
MOUNTING	Standard 304 stainless steel aimable mounting bracket (0.1", 2.6mm thickness) 180° tilt, 90° pan around central pivot Micro-adjustable for perfect aiming Locking bracket accommodates 1/4" (6mm) mechanical screws
SURFACE FINISH	Standard brushed anodized finish Custom painted colors also available
WEIGHT	1.2lb (0.6kg), with standard cable + mounting bracket

THERMAL

HEAT CONTROL	Use of entire fixture's surface area for ideal heat dissipation No fins, no dirt buildup
SURFACE FINISH	Anodized for better emissivity
OPERATING TEMP	-40°F to 185°F (-40°C to 85°C)

ELECTRICAL

INPUT VOLTAGE	24VDC (CLASS 2)
POWER	14W Maximum
V-BRAIN LIMIT	Connect maximum 4 per V-BRAIN 100. Please refer to specification guide.
CABLE	Standard 4' (1.2m) cable with quick connector (Q804), or optional 10' (3m) pigtail cable for fixed color applications (P210)
CONTROL INPUT	SACO Video (Up to 16 bit resolution) DMX512 (8 bit resolution) DMX512 with RDM (Remote Device Management) (8 bit) On/Off without control signal for fixed whites

OPTICAL

WHITE SERIES	High-intensity discrete LEDs Wide CCT range (2700, 4000, 5700K) Wide range of CRI (70 to 90+), high R9 value available upon request Binning as low as 3 MacAdam steps for consistent whites
LUMEN OUTPUT	From 1000 to over 1100 delivered lumens in warm white (WW), depending on source/optics combo
PERFORMANCE	From 75 to over 85lm/W, depending on source/optics combo
REFRACTORS	Injection molded PMMA total internal reflection collimators (TIR) Variety of axial and transverse beam angles, from circular to oval light spreads Factory installed for enhanced optical precision

SHOCKWAVE ACCESSORIES

EXTENSION CABLES	10' (3m) EXT10 and 20' (6m) EXT20 fixture extension cables may be used to lengthen standard cable to a maximum of 60' (18m) IP67 quick connectors for easy connections to V-BRAIN
MOUNTING	Multiple mounting and joining bracket options available See accessories guide for options
OPTICAL ACCESSORIES	Multiple optical accessories are available See accessories guide for options
CONTROLLERS	Multiple Shockwave video and DMX512 control options are available See accessories guide for options
MORE	Please refer to accessories guide for more information


ADDITIONAL INFORMATION

CERTIFICATION	ETL listed as per UL 2108, CSA C22.2 N° 250.0 CE IP 66, suitable for wet locations Roadway and Area Lighting Equipment Luminaire Vibration as per ANSI C136.31
WARRANTY	5 years
ORIGIN	Designed and made in North America





SPECIFICATIONS GUIDE

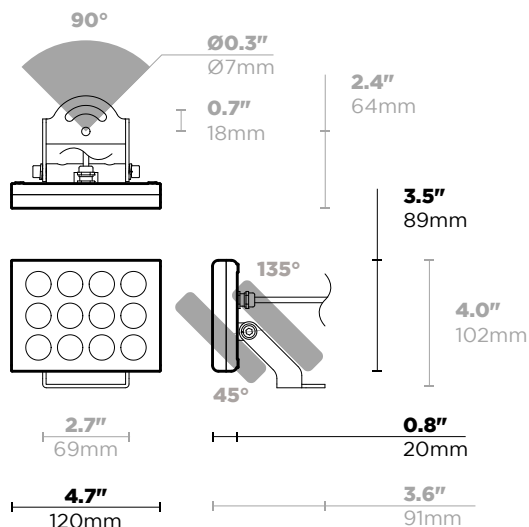

-TP MOUNTING HARDWARE VERSION, SEE ACCESSORIES GUIDE FOR MORE.
(ADJUSTABILITY AND MOUNTING DIMENSIONS IN GREY)



Copyright © 2018 by SACO. All Rights Reserved. Shockwave® is a registered trademark of SACO. All specifications subject to change without notice. Information furnished by SACO is believed to be accurate and reliable. However, no responsibility or liability by SACO for its use, nor for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or other rights by SACO.

PRODUCT ORDERING CODE



MODEL



COLOR LIGHT SOURCE

CW Cool White (Max 14W, 1300lm approx.. 5700K, 70 CRI min)
NW Neutral White (Max 14W, 1300lm approx.. 4000K, 80 CRI min)
WW Warm White (Max 14W, 1000lm approx.. 2700K, 90 CRI min)
DW Dynamic White (Max 14W, 2700-5700K)



LIGHT SPREAD (AXIAL + TRANSVERSE) ^{1,2}

N+N Narrow (Circular beam, nominal 15° TIR lens)
M+M Medium (Circular beam, nominal 30° TIR lens)
W+W Wide (Circular beam, nominal 50° TIR lens)
M+N Medium + Narrow (Oval beam, nominal 30°x15° TIR lens)
W+M Medium + Wide (Oval beam, nominal 50°x35° TIR lens)

¹All beam angle values (FWHM) may vary depending on specified light color.
Please refer to photometric guide for corresponding beam angles.

²Factory installed. Please refer to accessories guide for field-adjustable optical accessories.



CONTROL SPECIFICATION ³

SVD SACO Video (Up to 65,536 shades per color, dimming down to 0%)
DMX DMX512 ⁴ (Up to 256 shades per color, dimming down to 0%)
RDM DMX512 ⁴ + RDM (Up to 256 shades per color, dimming down to 0%)
OFF On/Off (No dimming)

³Remote power supply and control gear to be ordered separately.
Please refer to specification guide.

⁴DMX addresses must be identified on order.



CABLE HARNESS CONNECTOR

Q Quick connector ⁵ (8-pin, overmolded IP67)
P None, pigtail ⁶ (2 conductors, stripped wire ends, no connector)

⁵Default option, 8-conductor maximum cable length is 4' (1.2m), see below. Make sure connector choice corresponds with that of remote power supply.

⁶2-conductor cable compatible only, see below.



CABLE HARNESS LENGTH

801.2 8-conductor, 4' (1.2m) ⁷
8_ _ _ 8-conductor, custom length (please specify, in meters) ⁸
203.0 2-conductor, 10' (3m) ⁹
2_ _ _ 2-conductor, custom length (please specify, in meters) ¹⁰

⁷Default length option, comes fitted with 8-pin quick connector only (-Q, see above).

⁸Minimum 8-conductor cable length is 6" (0.15m) and maximum 10' (3m). Longer runs can be achieved using extensions. Refer to V-Brain wiring guide for details.

⁹2-conductor cables have pigtailed ends as standard (-P only, see above).

¹⁰Maximum 2-conductor cable length option is 80' (24m) length.



SURFACE FINISH

CLA Clear Anodized
BKA Black Anodized
_ _ _ Custom, please specify



MOUNTING HARDWARE ¹¹

TP Tilt + Pan mounting bracket (Tilt 180°, Pan 90°)
NO None
_ _ Custom, please specify

¹¹Tilt and pan aimable mounting bracket factory installed as standard. Please refer to accessories guide for further mounting options.



MOUNTING FINISH ¹²

SS Stainless Steel
_ _ Custom, please specify

¹²Bracket finish is exposed stainless steel, Custom finish to be applied to stainless steel. Consult your sales agent for compatible finishes, price and availability.



PHOTOMETRICS GUIDE

A NOTE ON PERFORMANCE

WHITE LIGHT All of the photometrics below are based on a warm white light source (-WW). Beam angle (FWHM) may vary depending on specified light color, as well as on fixture finish.

Photometric performance is measured in compliance with IESNA LM-79-08. Consult SACO website for the latest IES files.

LIGHT SPREAD Optics code sequence describe the type of light spread achieved both axially and transverse, in that order.

AXIAL + TRANSVERSE

