



LINEAR FLEX

LINEAR FLEX DYNAMIC COLORS



date	
customer	
project	
quantity	


The new ranges of Linear Flex® are the flexible linear LED solutions, for applications with curving linear surfaces or limited space. Those fixtures are used to provide high performance indirect lighting.

Linear Flex® is supplied in rolls with different power consumption. The Linear Flex® works under 24V DC and requires a power supply for its correct functioning.


The product is very flexible and can be installed easily onto any surface. Its small size enables it to be seamlessly integrated into architectural spaces.

Cove lighting and other applications


- 3 MacAdam: chromatic stability control
- RGB and DW – DYNAMIC COLORS
- Dimmable flexible strip
- It can be cut on size at site
- IP65, and IP67
- Accessories: aluminum profile, diffuser and lenses





Family	Option / CRI / Wattage Per Foot / Color Temp/IP Rating		Lens / Beam		Mounting		Driver	Input Voltage		
L-FLEX										
RGB	4.4W/FT - R/G/B - IP67		F	** L-FLEX ONLY 120°	F	** ADHESIVE	N	NON-DIM	24	24VDC
DW	90CRI - 5.85W/FT- 1900K-6000K - IP65		NL	NO LENS 120°	C	CLIP	A	0-10V		
			FC	FLAT CLEAR 120°	B15	15° BRKT				
			FO	FLAT OPAL 120°	B30	30° BRKT				
			HC	HIGH CLEAR 120°	B45	45° BRKT				
			HO	HIGH OPAL 120°						
			RC	ROUND CLEAR 120°						
			RO	ROUND OPAL 120°						
			C30	CLEAR LENS 30°						
			C60	CLEAR LENS 60°						

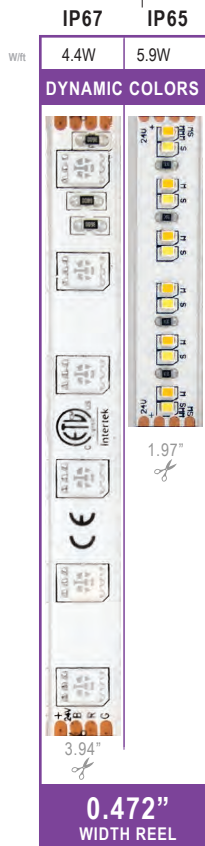


** L-FLEX STRIP ONLY, ALL OTHER INCLUDE ALUMINUM PROFILE

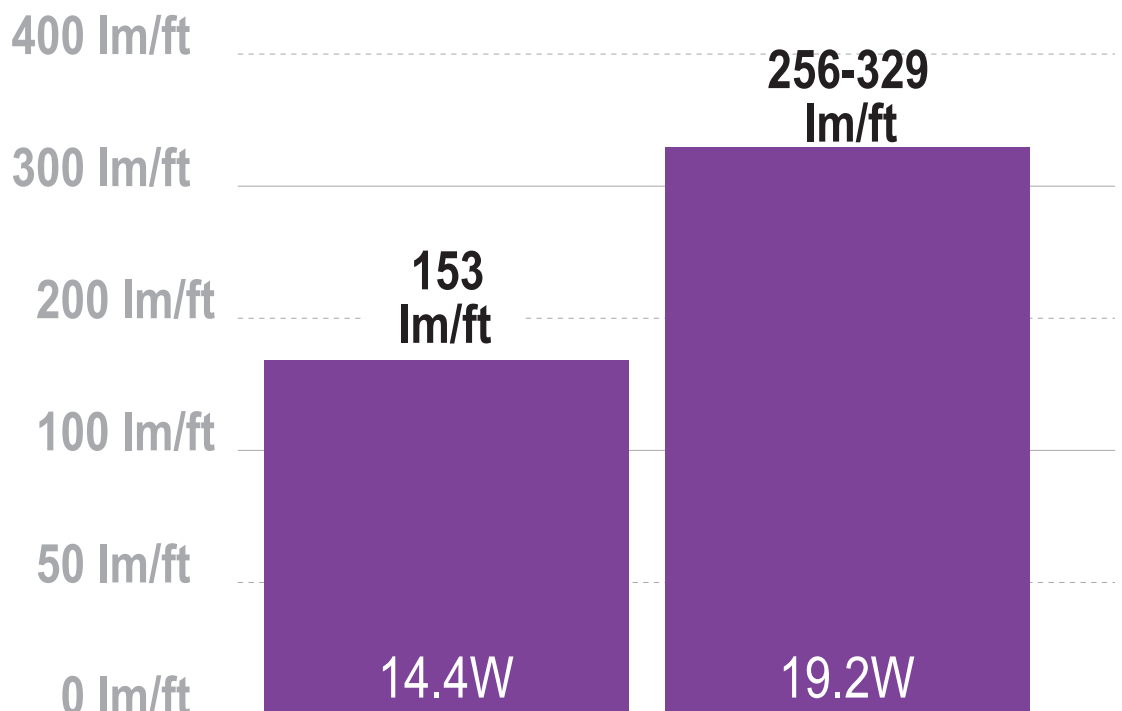


A Covers and lens

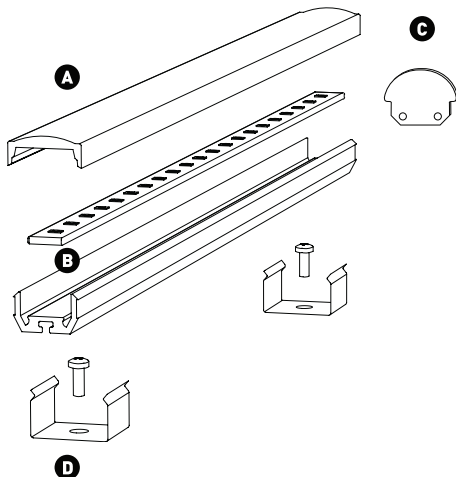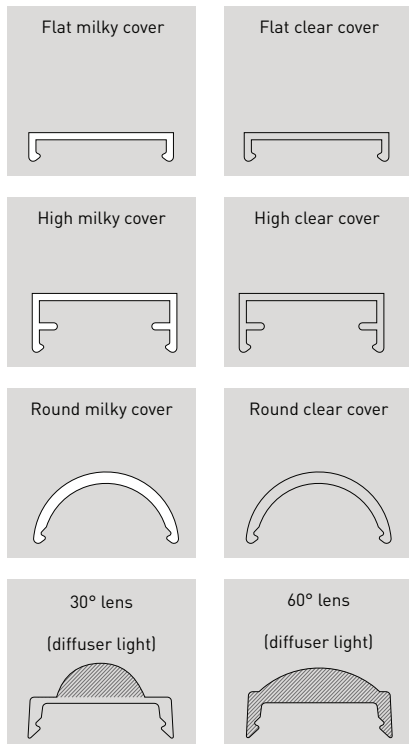


B Aluminum profile



C End caps

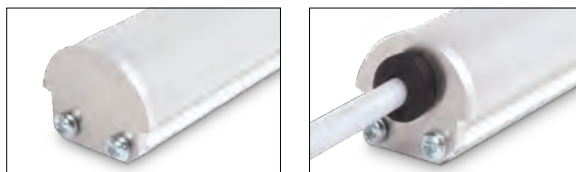

D Brackets

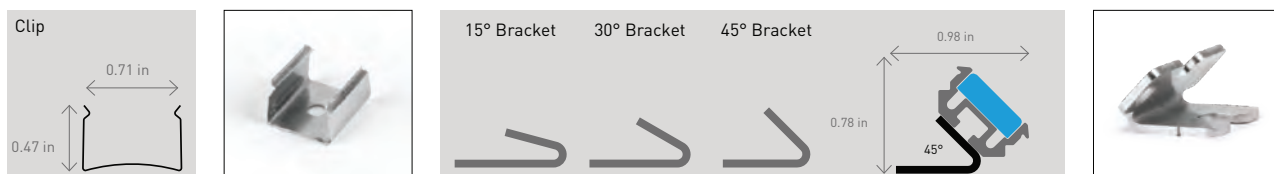

LED STRIP TABLE COMPATIBLE WITH END CAPS

Monocolor IP20					CRI>90		
4,8W/m	9,6W/m	14,4W/m	24W/m	33,6W/m	14,4W/m	24W/m	
✓	✓	✓	✓	✓	✓	✓	
IP67				RGB	RGBW	DW	
4,8W/m	9,6W/m	14,4W/m	24W/m	14,4W/m	16,3W/m	19,2W/m	
✓	✓	✓	✓	✗	✗	✗	


LED STRIP WITH 3M ADHESIVE TAPE OR THERMAL CONDUCTIVE

Monocolor IP20					CRI>90		Side
4,8W/m	9,6W/m	14,4W/m	24W/m	33,6W/m	14,4W/m	24W/m	9,6W/m
3M	3M	3M	TC	TC	3M	TC	3M
IP67				RGB	RGBW	DW	
4,8W/m	9,6W/m	14,4W/m	24W/m	14,4W/m	16,3W/m	19,2W/m	
3M	3M	3M	TC	3M	3M	3M	




3M adhesive tape


Thermal conductive tape




AL. Profile + Clip + Flat milky cover.




AL. Profile + Clip + High milky cover.




AL. Profile + Clip + Round clear cover.



AL. Profile + Clip + 60° Lens.




AL. Profile + Clip + 30° Lens.




AL. Profile + Clip.



Full scale drawings.

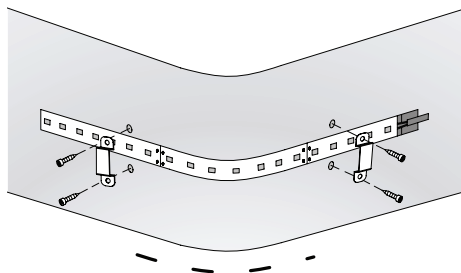

Screws and clips installation

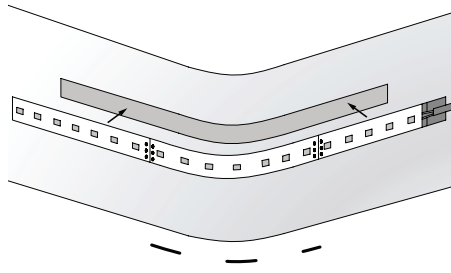

Double-side adhesive tape installation



Minimum bending
radius 30 mm.



IP67
Temporally
immersion
protection