	Project 21-12877-3 Date 6/25/2021 RGB/W Saturated Color	Catalog Number SLLO-24V 14W48 RGBW 120 SA	Type
	Submitted By 16500, INC	Notes	




SLICK LINEAR LED OUTDOOR RGB & RGB+W

24VDC DYNAMIC COLOR CHANGING SYSTEM



REV 03.15.21

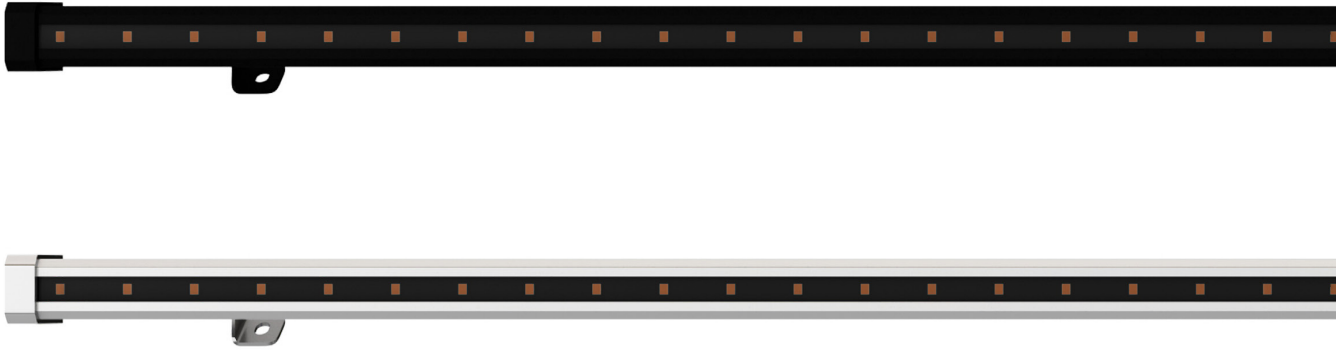

DESCRIPTION

The rugged design of the Slick Linear RGB, RGB+W Dynamic Color Changing lighting system, is ready for the harsh environments of mother nature. The Slick Linear is a clean, budget minded fixture that is less than 1" wide using advanced compact technology and design to provide up and down light with wall wash functionality, with it's 120 degree wash of LED light. The Slick Linear is manufactured with adjustable mounting clips that allows the Slick Linear to be mounted for many outdoor applications. Power and Control the Slick IP66 Rated fixture with a full touch controller and Universal (UNI) power supply (Sold Separately, See Pages 3-5). Link multiple fixtures to sync color effects. Single zone control not DMX addressable. Controller is NOT outdoor rated, and shall be located at a remote indoor location. Multiple Slick Linear RGB or RGB+W can be ganged together, up to 100 watts, before re-feeding.

ELECTRICAL

- Input Voltage: 24VDC, contains integrated DMX driver on board. All fixtures will function to a single address only.
- Universal (UNI) Power Supply 120/277VAC-24VDC, Sold Separately SKU: **PSB-(60W or 96W)-UNI-24VDC-W**
- Class 2 Power Supply
- Power Consumption of 3 watts/FT for RGB, and 3.42 watts/FT for RGB+W (2000K)
- LED's/FT: 15 LED's for RGB, and 7.5 + 7.5 LED's for RGB + W (3000K)
- Order in 4 Wattage/Length options, and gang multiple fixtures together, up to 100 watts before re-feeding
- Cable Connector: **OC-CFX-5CON-(12IN or 96IN)-W** Cord conductors can be ordered to gang multiple fixtures together for a watertight connection
- Dimming: DMX 512 Protocol Color Sync single zone non-addressable

FEATURES & BENEFITS

- 4 Wattage and 2 Length Options: 6W 24", and 10W 48" for RGB, and 7W 24", and 14W 48" for RGB+W (3000K)
- Controllable RGB (Red, Green, and Blue) LED's, OR RGB+W (Red, Green and Blue, Plus 3000K White) LED's
- Adjustable Mounting Clips: Innovative mounting clips are attached for Ground Level, Ceiling, or Wall mounting options, for Wall Grazing, Wall Washing, and general outdoor lighting applications
- Easy Installation: Push-In Water Right Barrel Connectors
- 120 Degree Beam Spread
- 2 Finish Options: Silver or Black Powder Coated Finish

PHYSICAL


- Material: Low Copper Aluminum Die Casting with High Pure Aluminum Alloy Extrusion, High Weather Resistant Outdoor Powder Coated Finish, Tempered Optical Glass Diffuser 1.25" thick LED COB
- Sizes: **RGB - 6W24** (24" x 0.9" x 1.3"), and **10W48** (48" x 0.9" x 1.3").
RGB+W - 7W24 (24" x 0.9" x 1.3"), and **14W48** (48" x 0.9" x 1.3").
- Operating Temperature: -4° F to 113° F
- Average LED Life: 50,000 Hours

COMPLIANCE

- Class 2 Power Supply
- ETL Listed
- IP66 Wet Rated
- Title 24

WARRANTY

5 Year Pro-rated Warranty from Time of Purchase

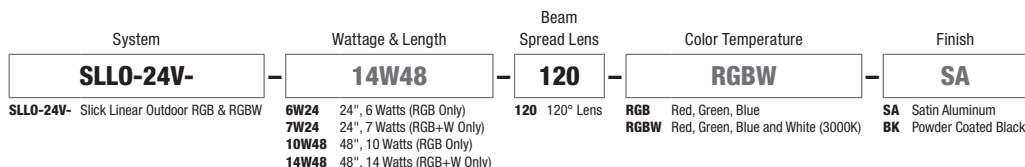





SLICK LINEAR LED OUTDOOR RGB & RGB+W

24VDC DYNAMIC COLOR CHANGING SYSTEM




REV 03.15.21


24" or 48"

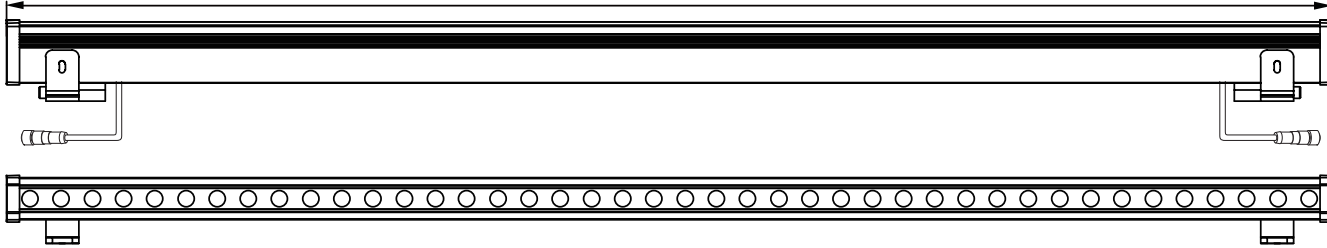

NOMINAL LIGHT DISTRIBUTION



NOMINAL BEAM SPREAD

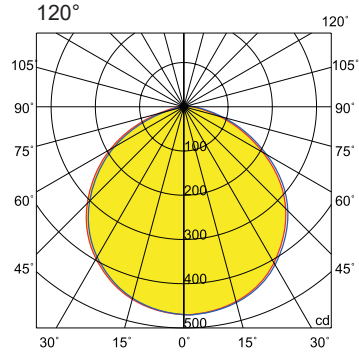

	Project 21-12877-3 Date 6/25/2021 RGB/W Saturated Color	Catalog Number SLLO-24V 14W48 RGBW 120 SA	Type
	Submitted By 16500, INC	Notes	




SLICK LINEAR LED OUTDOOR RGB & RGB+W

24VDC DYNAMIC COLOR CHANGING SYSTEM



REV 03.15.21

Components: Components for the Mini Star Linear Fixture

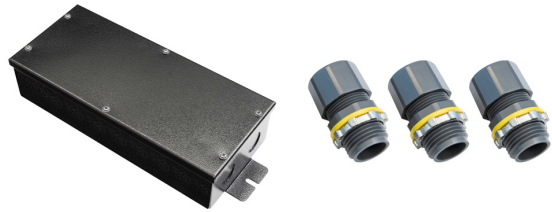

Con-1-2CORD-O Cord conductors included





UNI POWER SUPPLY

Universal Power Supply: 120/277VAC-24VDC with Universal dimming ELV, Triac or 0-10V dimmers. 100-0% Flicker free dimming. Aluminum casing for optimal heat dissipation. Isolated output power per NEC and UL safety requirements. UL & ETL recognized/ listed, meets UL8750, 1310 requirement. Auto-reset; short circuit, overload and thermal protection. Class 2 power supply. Efficient, High power factor > 0.90. Exceeds California Title 24 Requirements AAA rating. Efficiency > 84% Power Factor > 0.90. Case TC 90C° Max. Protection Input / Output Storage -30°C / +90°C Humidity 95% RH Max. Class 2 Power Supply Dimming ELV, Triac, 0-10V IP Rating IP20, IP67

Product	Wattage	Type	Voltage	Option
PSB	60W	UNI	24VDC	W
PSB Power Supply with Junction Box	60W 60 Watts 96W 96 Watts	UNI Uni Driver	24VDC 24VDC	W Wet Location

WET LOCATION JUNCTION BOX

Wet-rated low voltage Splice Box with connectors.



Product	Wattage	Type	Voltage	Option
PSB	60W	UNI	24VDC	W
PSB Power Supply with junction box	60W 60 Watts 96W 96 Watts	UNI Uni Driver	24VDC 24VDC	W Wet Location

WET LOCATION JUNCTION BOX WITH 6" POWER CABLE


This watertight, multi-fixture Junction Box is especially designed for lighting in wet and damp locations. It is versatile, rugged and simple to install. The Junction Box comes standard with a 6" Flexible Cable providing easy, safe, and reliable connections for 24V low voltage luminaires. This box is approved for indoor and outdoor usage and complies with all the requirements of UL1241 and the National Electric Code.



Product	Canopy	Product	Size	Option
OC	2RE	5CON	6IN	W
OC Outdoor Cable	2RE 2" Rectangle	5CON 5 Pin Connector	6IN 6"	W Wet Location

WET LOCATION POWER/JUMPER CABLE


This Flexible Connector is designed to work with all of our Linear Outdoor Systems in outdoor damp and wet environments. This Flexible Connector is easy to install and configure, helping you create innovative lighting designs. Length 12" or 96" .

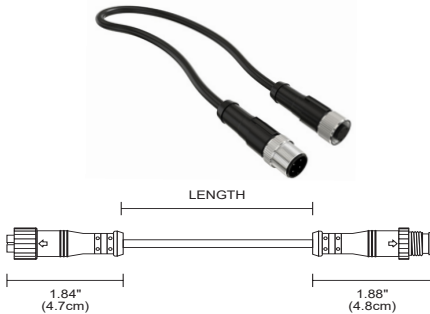

Product	Type	Product	Size	Option
OC	CFX	5CON	12IN	W
OC Outdoor Cable	CFX Flexible Connector	5CON 5 Pin Connector	12IN 12" 96IN 96"	W Wet Location

WET LOCATION CABLE PER FOOT


Our Wet Location, Cat5e 16 gauge 4 conductor cable is a durable and adaptable cable suitable for transmitting power, control, and switching to indoor and outdoor wet and damp environments (not for direct burial). Cable sold by the foot, simply specify the length (quantity) by the foot.



Product	Type
OC	CAT5-16-4
OC Outdoor Cable	CAT5-16-4 4 pair Cat5e with 4 16 gauge power wires



REV 03.15.21

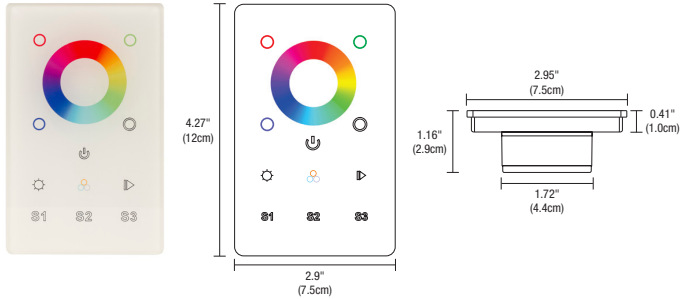

Description:

Full touch controller offers fast and accurate color tone adjustment and independent brightness control. The 1 zone controller can adjust RGB and RGBW LEDs smoothly and accurately. Independent smooth dimming of each channel enables the controller to achieve millions of colors. For indoor applications only, and includes a Power Adapter to operate the controller.

Applications:

Indoor

Power Input:

120-277VAC


Installation:

Fits in a single gang 2.5 inch deep junction box, not to be used with a multi gang box

Output Signal:

USITT DMX 512 (1990)

Product	Type	Finish
CDMX1	RGBW	WH
<small>CDMX1 DMX 1 Zone Touch Controller</small>	<small>RGBW RGB & RGBW</small>	<small>WH White</small>

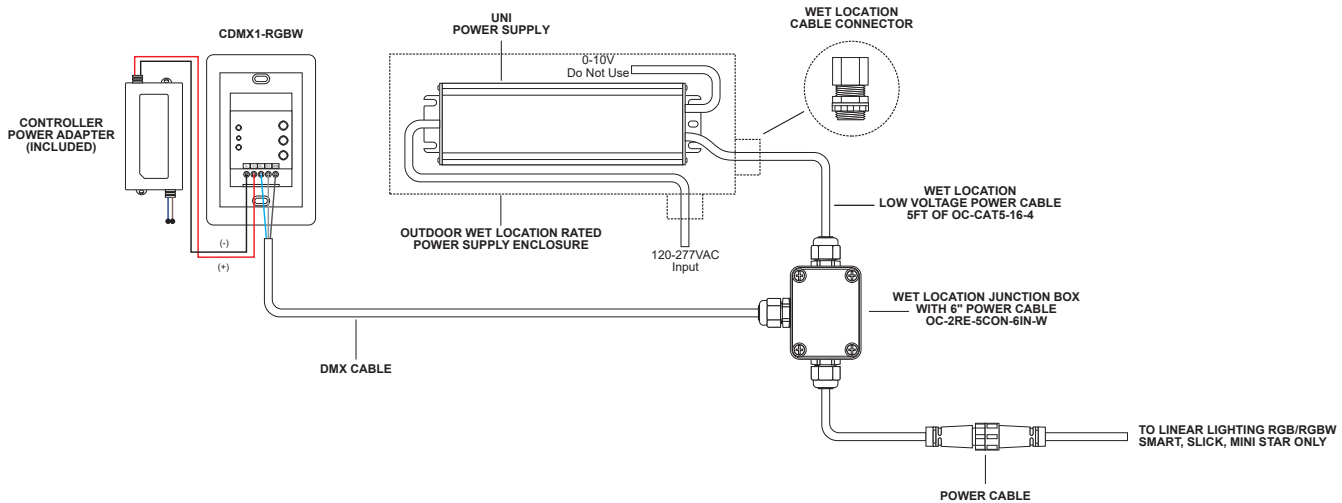




CTP
COLOR TOUCH SCREEN CONTROLLER WITH POWER ADAPTER



REV 03.15.21

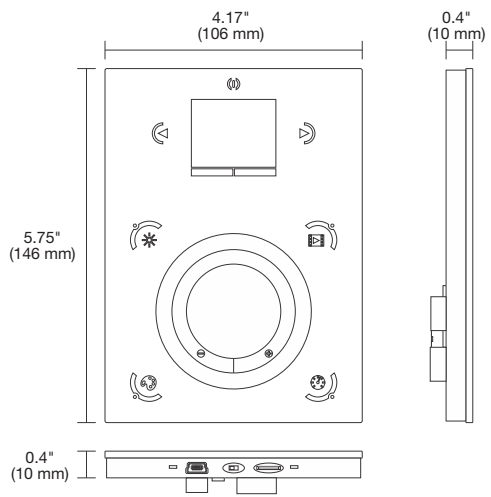

DESCRIPTION:

Full touch controller offers fast and accurate color tone adjustment and independent brightness control. The 10 zone controller can adjust RGB and RGBW LEDs smoothly and accurately. Independent smooth dimming of each channel enables the controller to achieve millions of colors. For indoor applications only, and includes a Power Adapter to operate the controller.

FEATURES AND BENEFITS:

KEY FEATURES:

- Sleek glass design which sits 11mm from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control
- RS232, Dry Contact Ports and an Infra Red input port
- Clock and calendar with Sunrise/Sunset triggering
- Network communication. Control lighting remotely
- Catalog of designs including black and white glass
- OEM customization of the color palette and logo
- Windows/Mac software to set dynamic colors/effects
- iPhone/iPad/Android remote and programming apps

APPLICATIONS:

Indoor

POWER ADAPTER:

9VDC 0.65A (included)

POWER INPUT:

7VDC 0.6A

OUTPUT SIGNAL:

DMX512 1,024 channels total

INPUT SIGNAL:

Universal IR receiver (Sold Separately), RS232, Contact Closure, Live Computer Link, DMX512, WiFi

CONNECTIONS:

USB, Ethernet, RS232, Clock, 8 dry contact ports, open drain output

MEMORY:

microSD (32GB Max)

COMPUTER AND MOBILE DEVICE REQUIREMENTS:

IPHONE/IPAD/ANDROID:


The controller may be used with any of the following apps: DMX Lightpad 3, Easy Remote and Arcolis may be downloaded from App Store or Google Play.

ESA PRO SOFTWARE (WINDOWS ONLY, TIMELINE AND MULTI-ZONE):

Windows ME, XP, Vista, 7 or 8 (32 bits and US 2.0, computer connection required for initial setup only.)

ESA2 SOFTWARE (WINDOWS/MAC, SINGLE ZONE):

Windows ME, XP, Vista, 7 or 8
Mac OS X 10.7 (Lion), 10.8 (Mountain lion), 10.9 (Mavericks), 10.10 (Yosemite)




CTP
 COLOR TOUCH SCREEN CONTROLLER WITH POWER ADAPTER



REV 03.15.21

WIRING DIAGRAM FOR LINEAR LIGHTING RGB/RGBW: SMART, SLICK AND MINI STAR ONLY

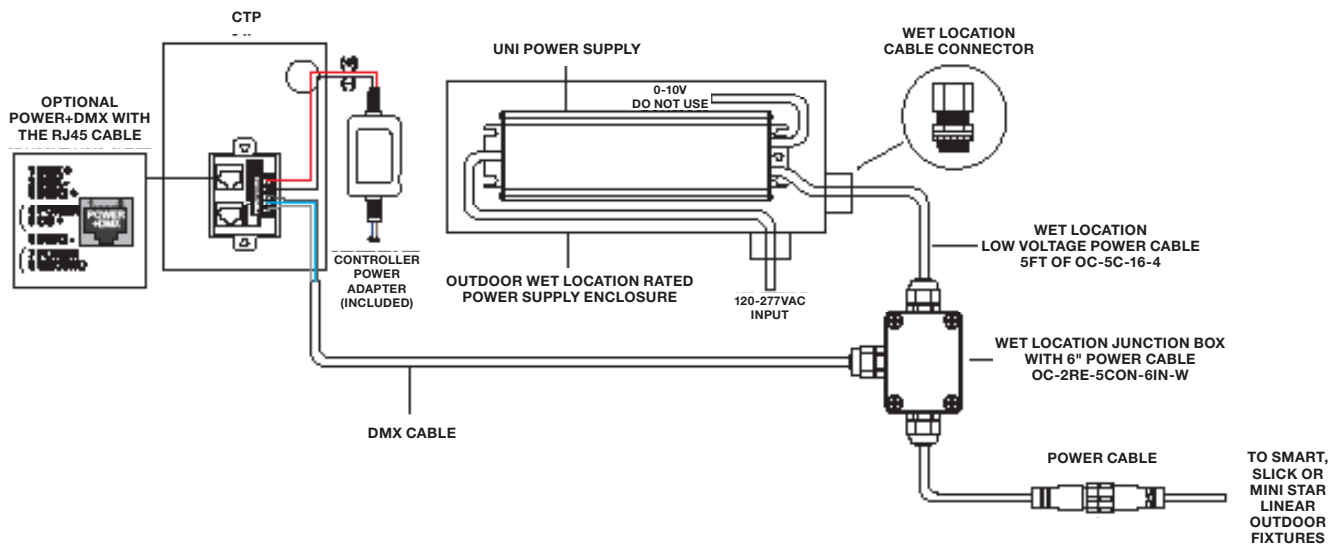

Con-1-2CORD-O Cord conductors included

OUTDOOR POWER SUPPLY FOR SMART, SLICK & MINI STAR FIXTURES

Universal Power Supply: 120/277VAC-24VDC with Universal dimming ELV, Triac or 0-10V dimmers. 100-0% Flicker free dimming. Aluminum casing for optimal heat dissipation. Isolated output power per NEC and UL safety requirements. UL & ETL recognized/ listed, meets UL8750, 1310 requirement. Auto-reset; short circuit, overload and thermal protection. Class 2 power supply. Efficient, High power factor > 0.90. Exceeds California Title 24 Requirements AAA rating. Efficiency > 84% Power Factor > 0.90. Case TC 90C° Max. Protection Input / Output Storage -30°C / +90°C Humidity 95% RH Max. Class 2 Power Supply Dimming ELV, Triac, 0-10V IP Rating IP20, IP67



Product	Wattage	Type	Voltage	Option
PSB	60W	UNI	24VDC	W
PSB Power Supply with junction box	60W 60 Watts 96W 96 Watts	UNI Uni Driver	24VDC 24VDC	W Wet Location